



RGB CONSTANT VOLTAGE

CODE	MODULE POWER	LUMINAIRE POWER
20-03-25-18-XX-H-RGB	23W	25W
20-03-35-18-XX-H-RGB	32W	35W

RGB ALL IN ONE

CODE	MODULE POWER	LUMINAIRE POWER
20-03-25-18-XX-D-RGB	23W	25W
20-03-35-18-XX-D-RGB	32W	35W

RGBW(A) CONSTANT VOLTAGE

CODE	MODULE POWER	LUMINAIRE POWER
20-03-25-18-XX-H-RGBW(A)	23W	25W
20-03-35-18-XX-H-RGBW(A)	32W	35W

RGBW(A) ALL IN ONE

CODE	MODULE POWER	LUMINAIRE POWER
20-03-25-18-XX-D-RGBW(A)	23W	25W
20-03-35-18-XX-D-RGBW(A)	32W	35W

XX : Lens Angle

USED POWER SUPPLY BRAND




USED LED BRANDS








RIO RGB / RGBW(A)

EN 60598 | IP66 | CE

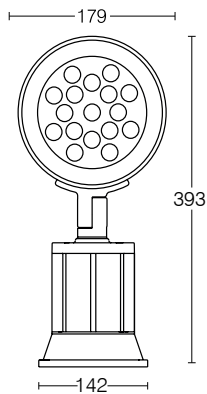

Photometric Curves



Technical Specifications

Floodlight made of aluminium die cast
Aluminium and stainless steel fittings
Clear 3mm polycarbon glass
Silicon base seal gasket
Mounting bracket made of plastic
Electrostatic powder coating
Lens angle 8°-25°-45°-60°
Color standard 7040, optional RAL codes
Input 24 V DC

Power factor (min.) 0.92
DMX 512 / RDM
Safety Class I
Protection Class IP66
Operation temperature -25°C / +55°C
Weight: All in One : 2,23 kg , Constant Voltage : 1,5 kg
Complies with European standards
EN 60598 and CE certificate

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

