





Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
15-01-03-08-XX-RGB	5W	6W
15-01-04-10-XX-RGBW	7W	8W


XX : Lens Angle

ASPEN RGB / RGBW(A)

EN 60598 | IK09 | IP67 | CE

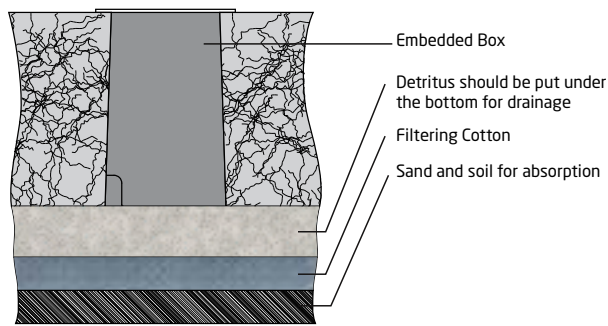

Photometric Curves

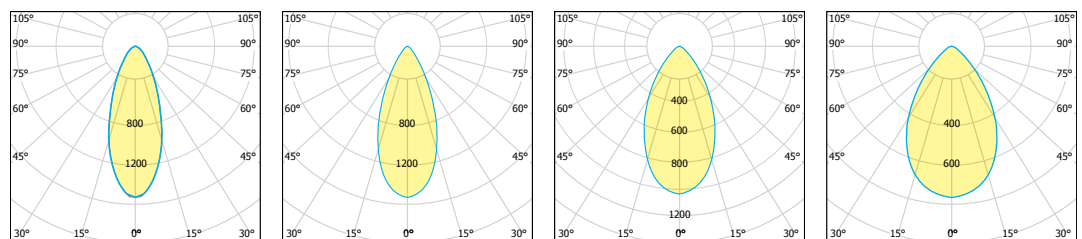

Technical Specifications

Inground made of aluminium die cast	RGB PWM signal
Aluminium and stainless steel	DMX 512 (Standard)
Clear 6mm safety glass	Safety Class I
Silicon base seal gasket	Protection Class IP67
Mounting bracket made of plastic	Impact strength IK09
Electrostatic powder coating	Operation temperature -25°C / +55°C
Lens angle 12° - 30° - 45° - 60° - 90°	Weight: 0,75 kg
Color standard 7040, optional RAL codes	Complies with European standards
Input 5V DC	EN 60598 and CE certificate
Power factor (min.) 0.92	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

