




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
20-04-01-08-XX-RGB	5W	6W
20-04-01-10-XX-RGBW	7W	8W

XX : Lens Angle

# DIO RGB / RGBW(A)



EN 60598 | IP66 | CE



## Optional Accessories



## Photometric Curves

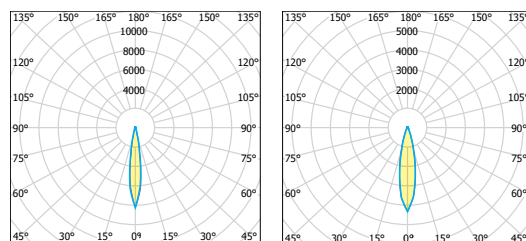

## Technical Specifications

Floodlight made of aluminium die cast
Aluminium and stainless steel fittings
Clear 3mm polycarbon glass
Silicon base seal gasket
Mounting bracket made of plastic
Electrostatic powder coating
Lens angle 15°-25°
Color standard 7040, optional RAL codes
Input 5V DC

Power factor (min.) 0.92
DMX 512 / RDM
Safety Class I
Protection Class IP66
Operation temperature -25°C / +55°C
Weight: 0,49 kg
Complies with European standards EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

