



Purchase Order Table


CODE	MODULE POWER	LUMINAIRE POWER
20-01-03-08-XX-RGB	5W	6W
20-01-03-10-XX-RGBw	7W	8W

XX : Lens Angle



MIRA RGB / RGBW(A)


EN 60598 | IK09 | IP66 | CE

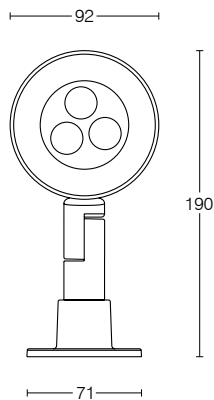

Optional Accessories



Photometric Curves

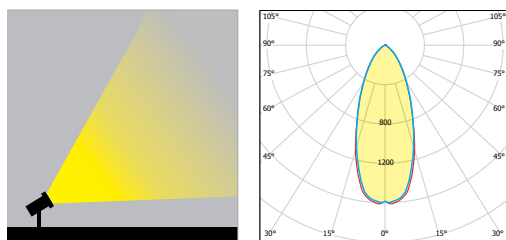

Technical Specifications

Floodlight made of aluminium die cast	Power factor (min.) 0.92
Aluminium and stainless steel fittings	DMX 512 / RDM
Clear 3mm polycarbon glass	Safety Class I
Silicon base seal gasket	Protection Class IP66
Mounting bracket made of plastic	Operation temperature -25°C / +55°C
Electrostatic powder coating	Weight: 0,75 kg
Lens angle 25°-45°(3 in1 full lens)	Complies with European standards
Color standard 7040, optional RAL codes	EN 60598 and CE certificate
Input 5V DC	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.