




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
30-01-24-3-XX-RGB	3W	3W
30-01-24-3-XX-RGBW	3W	4W

XX : Lens Angle

ORCA 3 RGB / RGBW(A)



EN 60598 | IP68 | CE

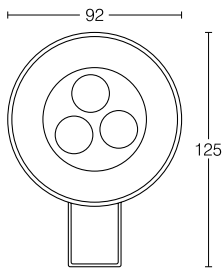

Max. Depth: 80cm



Photometric Curves

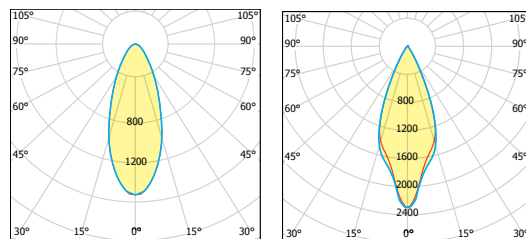

Technical Specifications

Under water made of stainless steel	DMX 512 (Standard), RF (Optional)
Clear 3mm polycarbon glass	Safety Class I
Silicon base seal gasket	Protection Class IP68
Mounting bracket made of stainless steel	Operation temperature -25°C / +55°C
Lens angle 25°-45° (3 in 1 full lens)	Weight: 0,27 kg
Front cover color standard (Chrome)	Complies with European standards
Input 5V DC	EN 60598 and CE certificate
Power factor (min.) 0.92	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

