




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
30-03-24-18-XX-RGB	16W	18W
30-03-24-18-XX-RGBW	16W	18W
30-03-24-18-PAR56-XX-RGB	16W	18W
30-03-24-18-PAR56-XX-RGBW	16W	18W

XX : Lens Angle



# ORCA 18 - ORCA PAR56 RGB / RGBW(A)

EN 60598 | IP68 | CE

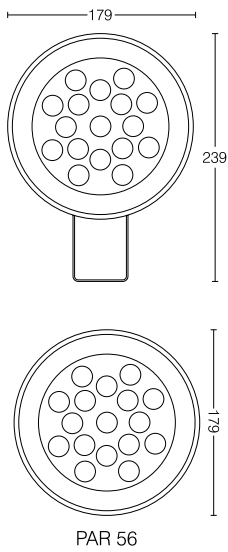

Max. Depth: 80cm

## Photometric Curves

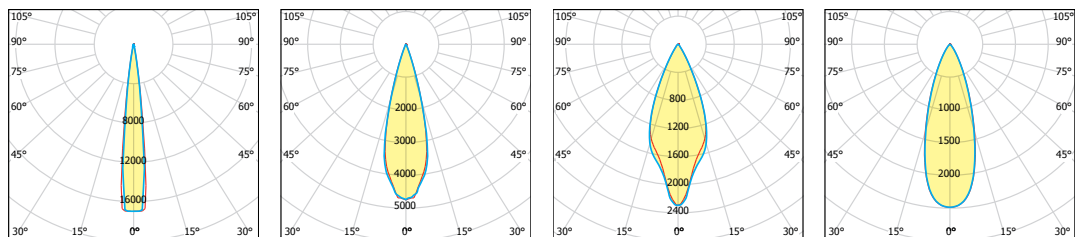

## Technical Specifications

Under water made of stainless steel	DMX 512 (Standard), RF (Optional)
Clear 3mm polycarbon glass	Safety Class I
Silicon base seal gasket	Protection Class IP68
Mounting bracket made of stainless steel	Operation temperature -25°C / +55°C
Lens angle 8°- 25°- 45°- 60°	Weight: 0,78 kg
Front cover color standard (Chrome)	Complies with European standards
Input 24V DC	EN 60598 and CE certificate
Power factor (min.) 0.92	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

