


TUNABLE

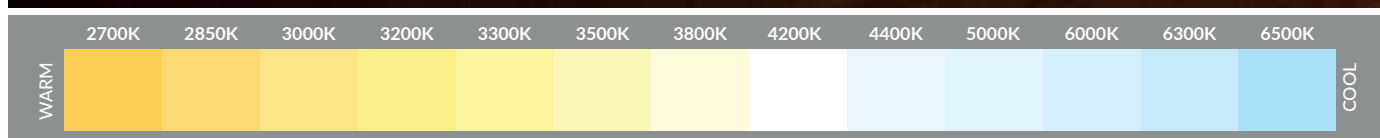

Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
01-07-60-15-XX-TW	14W	15W
01-07-60-22-XX-TW	20W	22W
01-07-90-22-XX-TW	20W	22W
01-07-90-31-XX-TW	28W	31W
01-07-120-31-XX-TW	28W	31W
01-07-120-47-XX-TW	43W	47W

XX : Lens Angle

USED POWER SUPPLY BRANDS


PHILIPS OSRAM TRIDONK

USED LED BRANDS

NICHIA
LUMILEDS

ARSEN AC TUNABLE

EN 60598 | IK09 | IP66 | CE

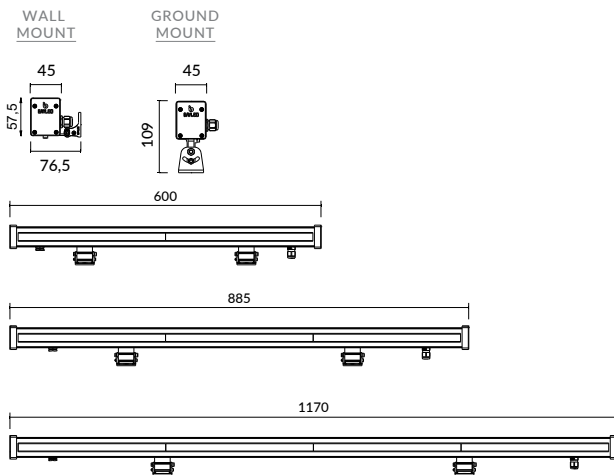

FEATURES

High-quality tunable white light from the same fixture. Arsen AC Tunable is an advanced approach to light tuning that enables high-quality intelligent tunable white.

Sirus L Tunable luminaires - CCT from 2700K to 6500K, dimming from 100% to 1% - help designers tailor the illumination and ambiance to satisfy user needs and preferences.

DALI - 0-10V

Interface : Controllable driver
Control method : Analog with cable
Fixture Connections : With control cable

DALI BLUETOOTH


Interface : Controllable driver
Control method : Bluetooth
Fixture Connections : With control cable

FIXTURE RUN LENGTHS

To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.



Photometric Curves

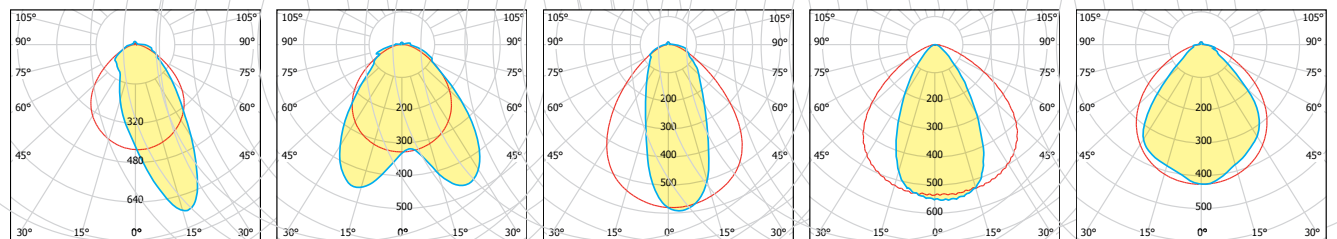

Technical Specifications

Wallwasher made of aluminium extrusion,

Clear 5mm safety glass

Silicon rubber gasket

Swivel range 30°

Mounting bracket made of plastic.

Lens angle 18°- 25°- 30°x90°- 60°x110°- 90°x110°

Color standard mat anodized,

Input 198-264V AC 50 / 60 Hz

Power factor (min.) 0.92

Tunable White PWM signal with RC (Standard)

DALI or Bluetooth(optional) controllable

0-10V / 1-10V controllable (Optional)

Safety class I

Protection class IP66

Impact strength IK09

Operation temperature -25°C / +55°C

Wind catching area: 0,03m²

Weight: 60cm: 1,2kg / 88,5cm: 1,7kg / 117cm: 2,2kg

Complies with European standards

EN 60598 and CE certificate



CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant



Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

