


**TUNABLE**

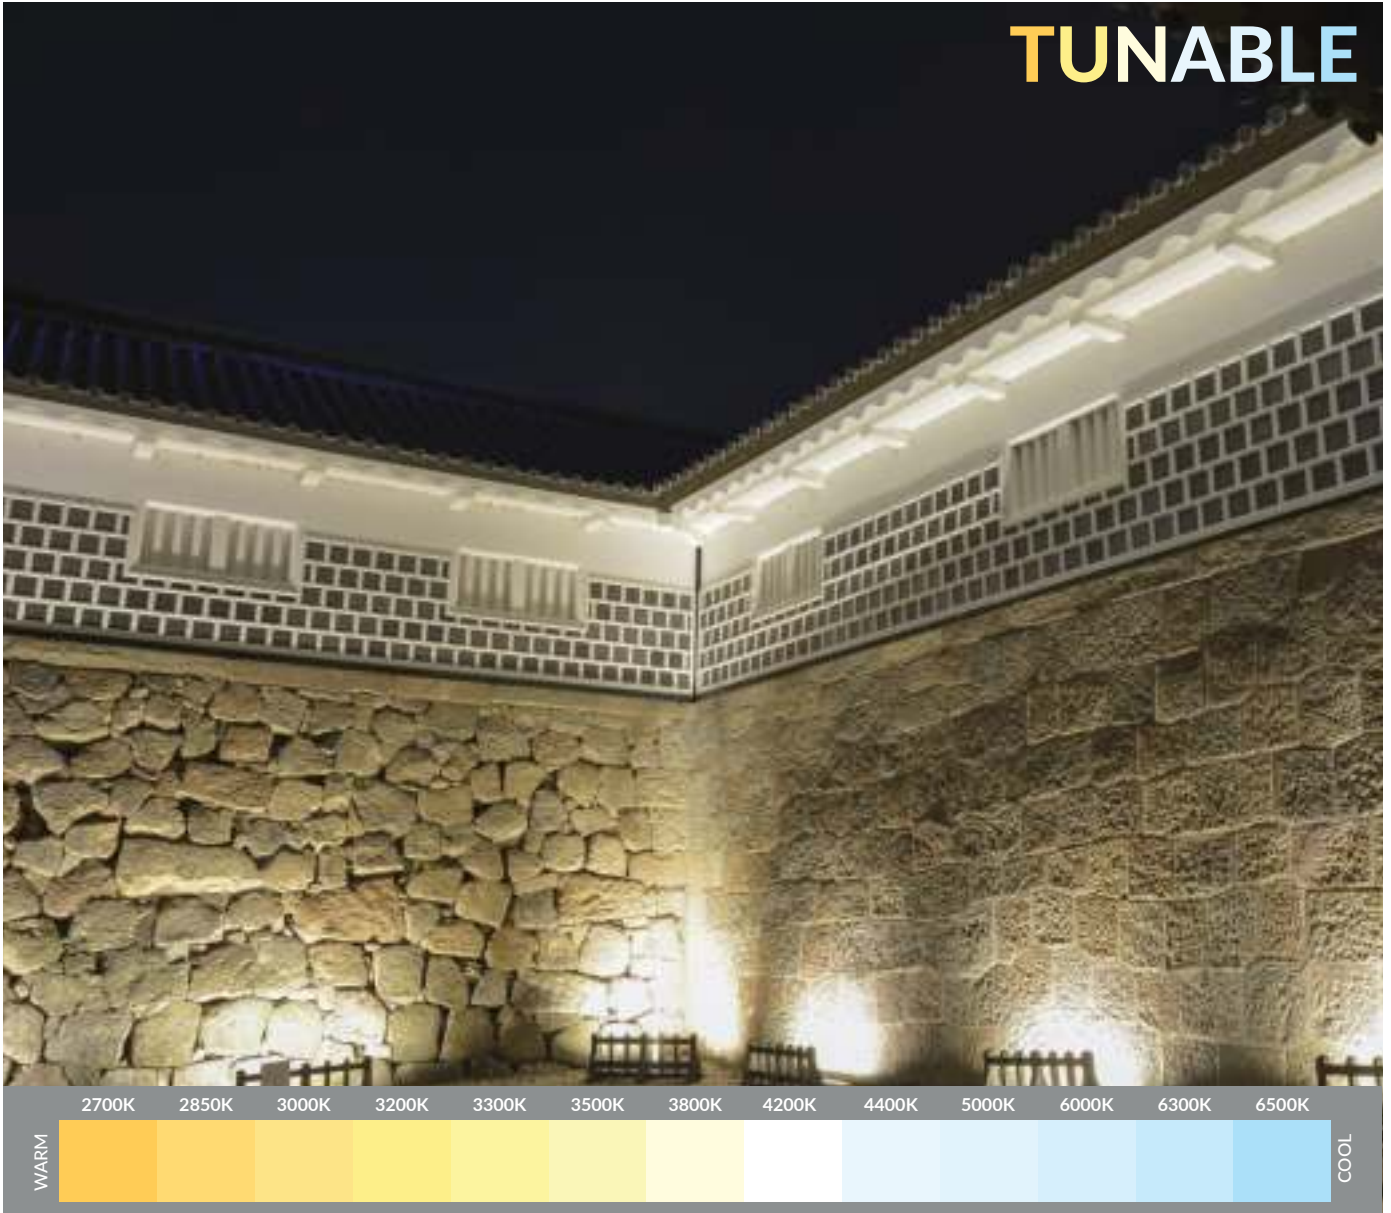


Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
01-04-61-14-XX-X	13W	14W
01-04-91-21-XX-X	19W	21W
01-04-120-28-XX-X	26W	28W

XX : Lens Angle

# RIGEL TUNABLE

EN 60598 | IK09 | IP66 | CE

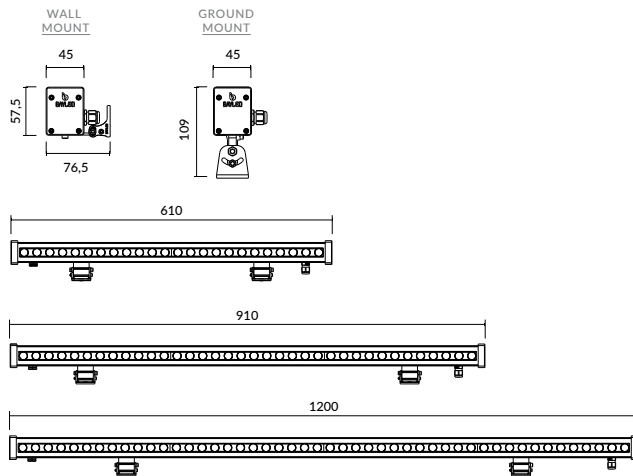

## FEATURES

High-quality tunable white light from the same fixture. Rigel Tunable is an advanced approach to light tuning that enables high-quality intelligent tunable white.

Sirus L Tunable luminaires - CCT from 2700K to 6500K, dimming from 100% to 1% - help designers tailor the illumination and ambiance to satisfy user needs and preferences.

### DALI - 0-10V

Interface : Controllable driver  
Control method : Analog with cable  
Fixture Connections : With control cable

### DALI BLUETOOTH






Interface : Controllable driver  
Control method : Bluetooth  
Fixture Connections : With control cable



## FIXTURE RUN LENGTHS

To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.

## Photometric Curves



## Technical Specifications

Wallwasher made of aluminium extrusion,

Clear 5mm safety glass

Silicon rubber gasket

Swivel range 30°

Mounting bracket made of plastic.

Multi Lens (linear): 17° - 25° - 35° - 20°x45°(asym)

Color standard mat anodized,

Input 198 -264V AC 50 / 60 Hz

Power factor (min.) 0.92

Tunable White PWM signal with RC (Standard)

DALI or Bluetooth(optional) controllable

0-10V / 1-10V controllable (Optional)

Safety class I

Protection class IP66

Impact strenght IK09

Operation temperature -25°C / +55°C

Wind catching area: 0,03m<sup>2</sup>

Weight: 61cm: 1,2kg / 91cm: 1,7kg / 120cm: 2,2kg

Complies with European standards

EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

