




Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
01-07-61-35-XX-RGB-DMX	32W	35W
01-07-91-50-XX-RGB-DMX	46W	50W
01-07-120-70-XX-RGB-DMX	64W	70W

XX : Lens Angle

# ARSEN AC RGB

EN 60598 | IK09 | IP66 | CE

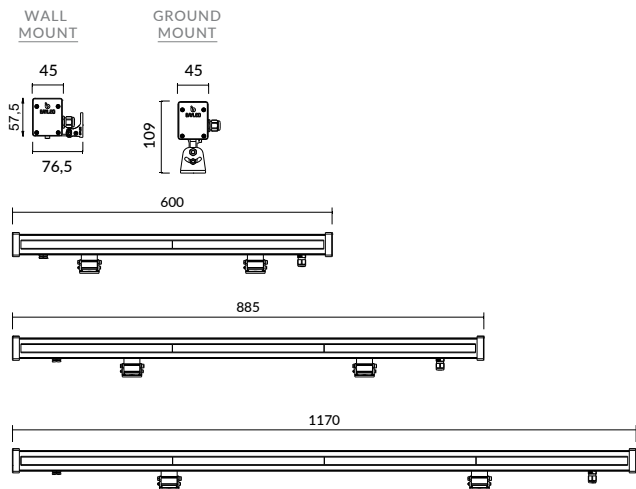

## FEATURES

Color-changing and high-quality white light from the same fixture. Arsen AC is an advanced approach to color mixing that enables high-quality intelligent color. Multiple channels of LED lightsources combine to produce a full spectrum of precisely controllable light, including millions of saturated colors, pastels and uniform white light.

## FIXTURE RUN LENGTHS


To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.

## DMX 512

Interface : Data Enabler (DMX/Bayled)  
 Address method : DMX512 (RDM)  
 Fixture Connections : Male/female IP67 connectors



## Photometric Curves

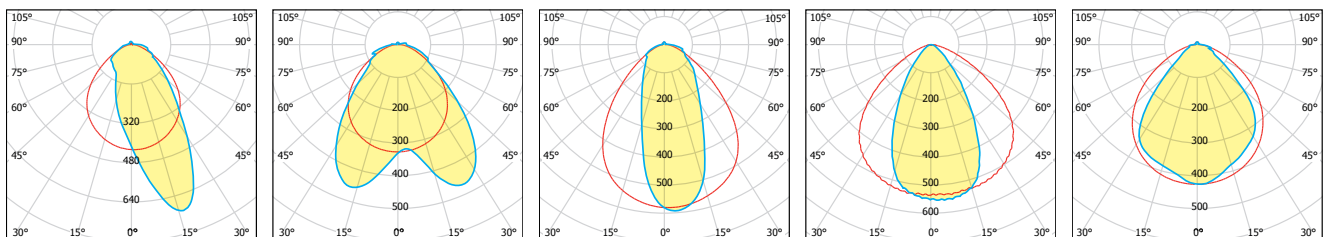

## Technical Specifications

Wallwasher made of aluminium extrusion,	DMX 512 / RDM
Clear 5mm safety glass	Safety class I
Silicon rubber gasket	Protection class IP66
Swivel range 30°	Impact strenght IK09
Mounting bracket made of plastic.	Operation temperature -25°C / +55°C
Lens angle 18°- 25°- 30°x90°- 60°x110°- 90°x110°	Wind catching area: 0,03m²
Color standard mat anodized,	Weight: 60cm: 0,8kg / 88,5cm: 1,8kg / 117cm: 2,3kg
Input 198-264V AC 50 / 60 Hz	Complies with European standards
Power factor (min.) 0.92	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

