

MICROLITE


Emergency Exit Signs Single / Double Sided

Specifications

Application	Escape Sign
Mounting	Direct mounting to wall & ceiling. Suspended & flag mounting are available by accessories
Type	Manual Test, Self Test, Wireless
Mode	Maintained
Emergency Duration	3 hours
Viewing Distance	30m. Single & double sided
Light Source	7xLeds, 6500K, CRI>80, 60 Lumen
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm ² quick fit terminal block
Cable Entry	Two easy breakable entry holes on back & upper part
Power Supply	230 Volt, 50/60Hz, max 0,02A, max 3W
Protection	IP30
Temperature Range	0-40°C
Electrical Class	Class II (no earth wiring required)
Material	Thermoplastic housing
Color	White



Dimensions (mm)

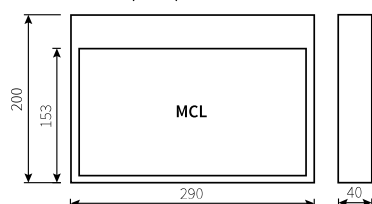

Ordering Details

Product Code	Type	Mounting Detail	Light Source	Operating Mode	Duration
Single Sided					
MCL1-M307	Standard	Wall / Ceiling	7xLED (60 Lumen)	M Maintained	3 hours
MCL1-M307-ST	Self-Test				
MCL1-M307-WF	WIRE-FLY				
MCL1-724	Central			24V AC/DC	Centrally Powered
MCL1-7230				230V AC/DC	
Double Sided					
MCL2-M307	Standard	Ceiling	7xLED (60 Lumen)	M Maintained	3 hours
MCL2-M307-ST	Self-Test				
MCL2-M307-WF	WIRE-FLY				
MCL2-724	Central			24V AC/DC	Centrally Powered
MCL2-7230				230V AC/DC	

Viewing Distance

