

Standard Lumen Output (Beam angle options: 15°-40°-ASYM)

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
45-30-600-576-XX-X	546W	600W	108900lm - 112860lm	99000lm - 102600lm	3000K-4000K
45-30-700-576-XX-X	636W	700W	125510lm - 129360lm	114100lm - 117600lm	3000K-4000K

Sport Illumination (Beam angle options: 15°-40°-ASYM)

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
45-36-600-576-XX-X	546W	600W	71136lm	62400lm	5700K
45-36-700-576-XX-X	636W	700W	81396lm	71400lm	5700K

XX : Lens Angle, X : Led Color  
 Standard color temperature 4000K, also available with 6500K on request.

# PRIMUS PRL-6

EN 60598 | IK09 | IP66 | CE

**DALI** **1.....10V**



DALI / 1-10 V DIMMABLE VERSION  
AVAILABLE ON REQUEST



**FIXED HEAD**



**MOVABLE HEAD**

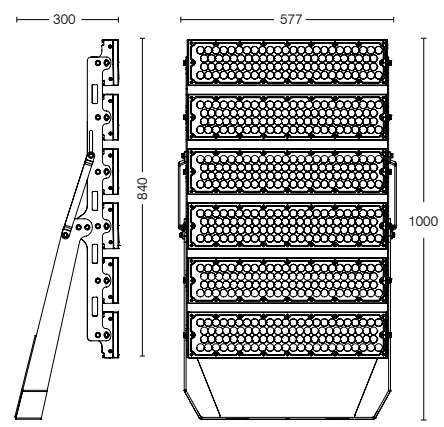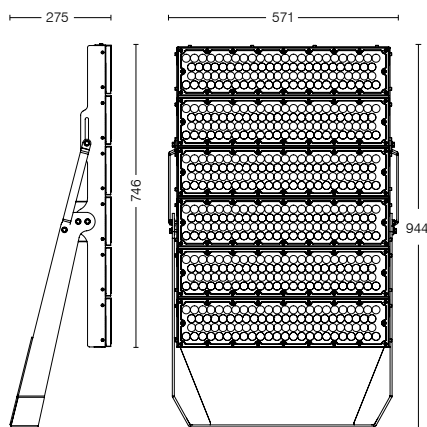

## Technical Specifications

Floodlight made of aluminium extrusion	DALI controllable (Optional)
Galvanized steel fittings	0-10V / 1-10V controllable (Optional)
Silicon rubber gasket	Safety Class I
Swivel range 100°	Protection class IP66
Mounting bracket made of steel with Electrostatic powder coating	Impact strength IK09
Lens angle 15°-40°-ASYM	Operation temperature -25°C / +55°C
Color standard MT-X6-23, optional RAL codes	Wind catching area: 0,54m²
Input 100 - 305V AC 50 / 60 Hz	Weight: Fixed Head: 28,6 kg / Movable Head: 29,6 kg
Power factor (min.) 0.92	EULUMDAT files available
Mono color (Standard)	Complies with European standards
	EN 60598 and CE certificate
	6kV surge protection (10kV optional)

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

