



Standard Lumen Output (Beam angle options: 15°-40°-ASYM)

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
45-31-800-768-XX-X	727W	800W	145200lm - 150480lm	132000lm - 136800lm	3000K-4000K
45-31-940-768-XX-X	855W	940W	168542lm - 173712lm	153220lm - 157920lm	3000K-4000K

Sport Illumination (Beam angle options: 15°-40°-ASYM)

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
45-38-800-768-XX-X	727W	800W	94848lm	83200lm	5700K
45-38-940-768-XX-X	855W	940W	109303lm	95880lm	5700K


XX : Lens Angle, X : Led Color
Standard color temperature 4000K, also available with 6500K on request.

PRIMUS PRL-8

EN 60598 | IK09 | IP66 | CE

DALI **1.....10V**

DALI / 1-10V DIMMABLE VERSION
AVAILABLE ON REQUEST

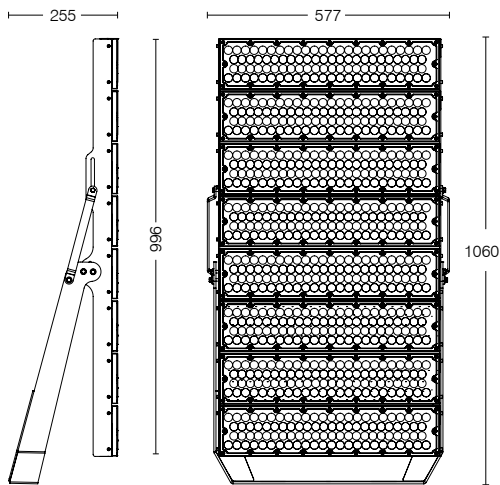

Technical Specifications

Floodlight made of aluminium extrusion	DALI controllable (Optional)
Galvanized steel fittings	0-10V / 1-10V controllable (Optional)
Silicon rubber gasket	Safety Class I
Swivel range 100°	Protection class IP66
Mounting bracket made of steel with Electrostatic powder coating	Impact strength IK09
Lens angle 15°-40°-ASYM	Operation temperature -25°C / +55°C
Color standard MT-X6-23, optional RAL codes	Wind catching area: 0,61 m²
Input 100 - 305V AC 50 / 60 Hz	Weight: 32 kg
Power factor (min.) 0.92	EULUMDAT files available
Mono color (Standard)	Complies with European standards
	EN 60598 and CE certificate
	6kV surge protection (10kV optional)

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

