




Purchase Order Table

| CODE                    | MODULE POWER | LUMINAIRE POWER |
|-------------------------|--------------|-----------------|
| 01-04-61-28-XX-RGB-DMX  | 26W          | 28W             |
| 01-04-91-38-XX-RGB-DMX  | 35W          | 38W             |
| 01-04-120-54-XX-RGB-DMX | 49W          | 54W             |
| 01-04-61-28-XX-RGBW     | 26W          | 28W             |
| 01-04-91-38-XX-RGBW     | 35W          | 38W             |
| 01-04-120-54-XX-RGBW    | 49W          | 54W             |

XX : Lens Angle

# RIGEL RGB / RGBW(A)

EN 60598 | IK09 | IP66 | CE

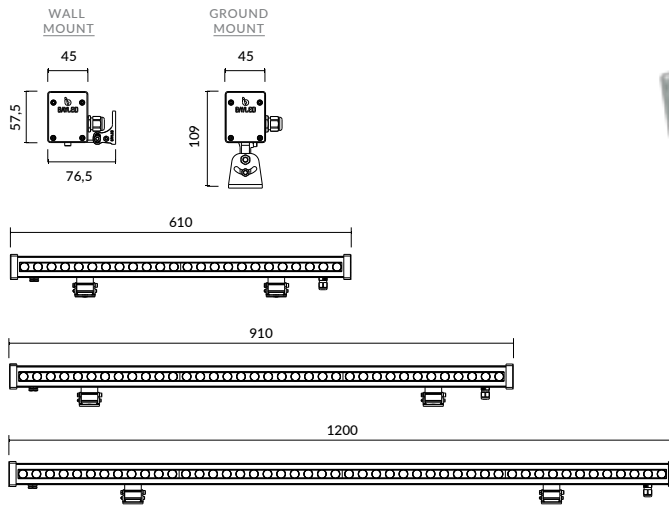

## FEATURES

Color-changing and high-quality white light from the same fixture. Rigel is an advanced approach to color mixing that enables high-quality intelligent color. Multiple channels of LED light sources combine to produce a full spectrum of precisely controllable light, including millions of saturated colors, pastels and uniform white light.

## FIXTURE RUN LENGTHS



To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.

## DMX 512

Interface : Data Enabler (DMX/Bayled)  
 Address method : DMX512 (RDM)  
 Fixture Connections : Male/female IP67 connectors



## Photometric Curves

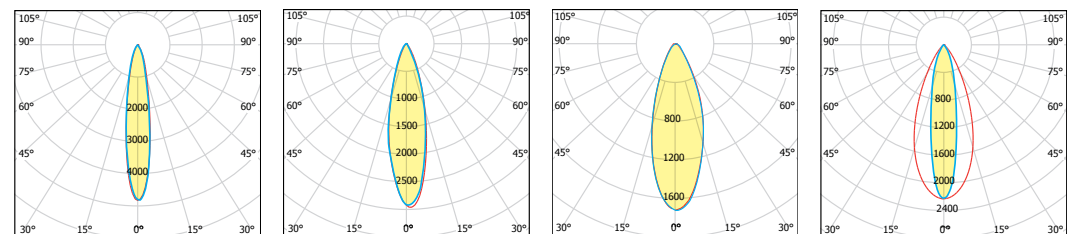

## Technical Specifications

|  |  |
|--|--|
| Wallwasher made of aluminium extrusion,              | DMX 512 / RDM                                      |
| Clear 5mm safety glass                               | Safety class I                                     |
| Silicon rubber gasket                                | Protection class IP66                              |
| Swivel range 30°                                     | Impact strenght IK09                               |
| Mounting bracket made of plastic.                    | Operation temperature -25°C / +55°C                |
| Multi Lens (linear): 17° - 25° - 35° - 20°x45°(asym) | Wind catching area: 0,03m²                         |
| Color standard mat anodized,                         | Weight: 61 cm: 1,3kg / 91 cm: 1,8kg / 120cm: 2,3kg |
| Input 198 -264V AC 50 / 60 Hz                        | Complies with European standards                   |
| Power factor (min.) 0.92                             | EN 60598 and CE certificate                        |

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

