



Purchase Order Table


CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-05-01-01-XX-X	1W	1W	83lm - 87lm	75lm - 79lm	3000K-4000K
20-05-01-03-XX-X	3W	3W	261lm - 275lm	225lm - 237lm	3000K-4000K

XX : Lens Angle, X : Led Color


Standard color temperature 4000K, also available with 6500K on request.

ANKA SQUARE

EN 60598 | IK07 | IP67 | CE

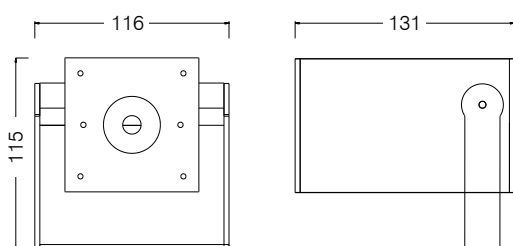

Photometric Curves

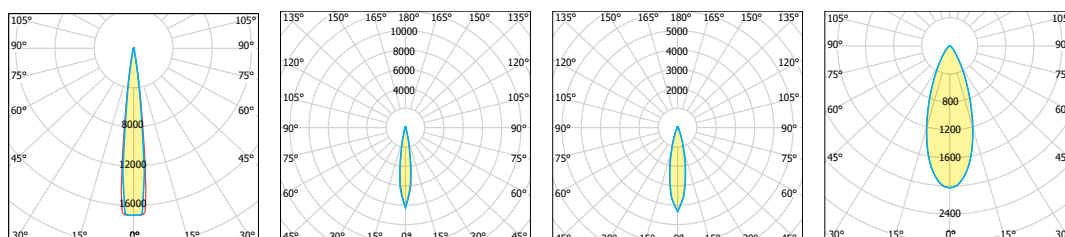

Technical Specifications

Floodlight made of aluminium die cast & extrusion

Aluminium and stainless steel fittings

Clear 5mm safety glass

Silicon base seal gasket

Mounting bracket made of aluminium

Electrostatic powder coating

Lens angle 8°-15°-25°-36°-60°

Color standard 7040, optional RAL codes

Input 100-240V AC 50 / 60 Hz

Power factor (min.) 0.92

Mono color (Standard)

DALI controllable (optional) (external)

0-10V / 1-10V controllable (optional)(external)

Safety Class I

Protection Class IP67

Impact strength IK07

Operation temperature -25°C / +55°C

Weight: 1,05 kg

Complies with European standards

EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

