



Purchase Order Table


CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-06-04-04-XX-X	4W	4W	226lm -242lm	205lm - 220lm	3000K-4000K

XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.




ASPEN SQUARE

EN 60598 | IK07 | IP67 | CE

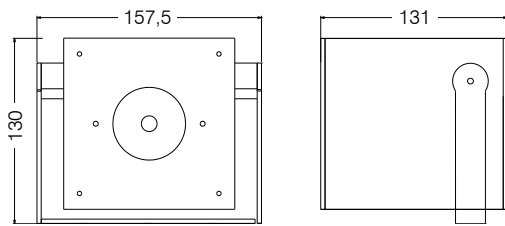

Photometric Curves

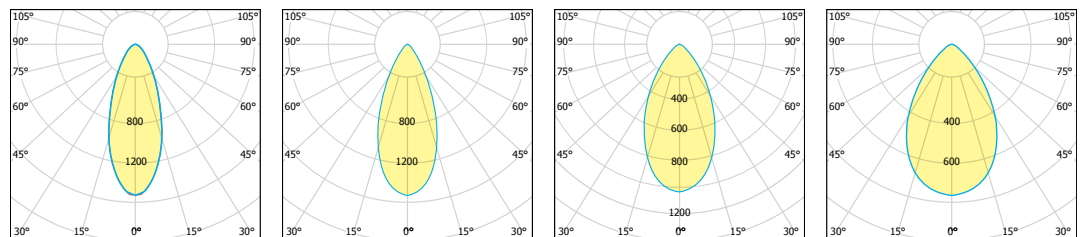

Technical Specifications

Floodlight made of aluminium die cast & extrusion	Mono color (Standard)
Aluminium and stainless steel fittings	DALI controllable (optional) (external)
Clear 5mm safety glass	0-10V / 1-10V controllable (optional)(external)
Silicon base seal gasket	Safety Class I
Mounting bracket made of aluminium	Protection Class IP67
Electrostatic powder coating	Impact strength IK07
Lens angle 25°-40°-60°-80°	Operation temperature -25°C / +55°C
Color standard 7040, optional RAL codes	Weight: 3 kg
Input 100-240V AC 50 / 60 Hz	Complies with European standards
Power factor (min.) 0.92	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

