


SINGLE HEAD

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-09-03-04-XX-X	4W	4W	226lm - 242lm	205lm - 220lm	3000K-4000K


DOUBLE HEAD

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-09-06-08-XX-X	7W	8W	458lm - 493lm	416lm - 448lm	3000K-4000K





XX : Lens Angle, X : Led Color
 Standard color temperature 4000K, also available with 6500K on request.

TERRA ROUND

EN 60598 | IK09 | IP67 | CE

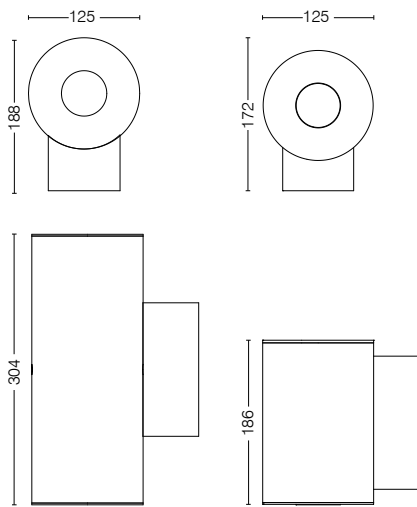

Photometric Curves



Technical Specifications

- Sconce made of aluminium die cast & extrusion
- Aluminium and stainless steel
- Clear 5mm safety glass
- Silicon base seal gasket
- Mounting bracket made of steel
- Electrostatic powder coating
- Lens angle 25°-40° -60°-80°
- Color standard 7040, optional RAL codes
- Input 100-240V AC 50 / 60 Hz
- Power factor (min.) 0.92

- Mono color (Standard)
- DALI controllable (Optional)(External)
- 0-10V / 1-10V controllable (Optional) (External)
- Safety Class I
- Protection Class IP67
- Impact strength IK09
- Operation temperature -25°C / +55°C
- Weight: Single Head: 1,60 kg , Double Head : 2,56 kg
- Complies with European standards
- EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

