



#### SINGLE HEAD

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-010-03-06-XX-X	4W	4W	226lm - 242lm	205lm - 220lm	3000K-4000K


#### DOUBLE HEAD

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-010-06-08-XX-X	7W	8W	458lm - 493lm	416lm - 448lm	3000K-4000K


XX : Lens Angle, X : Led Color  
Standard color temperature 4000K, also available with 6500K on request.

# TERRA SQUARE

EN 60598 | IK09 | IP67 | CE

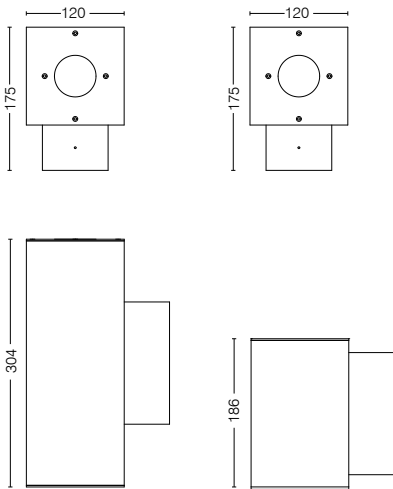

## Photometric Curves

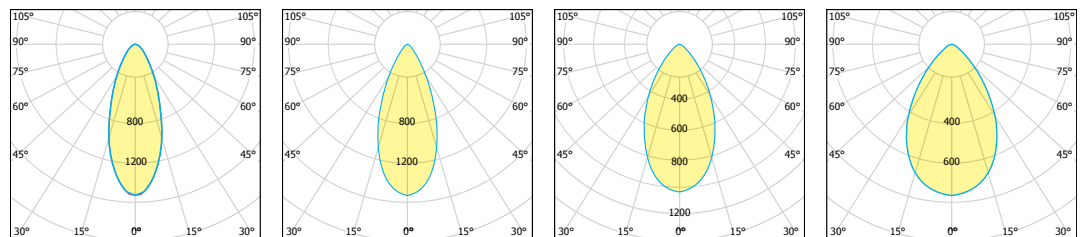

## Technical Specifications

Sconce made of aluminium die cast & extrusion

Aluminium and stainless steel

Clear 5mm safety glass

Silicon base seal gasket

Mounting bracket made of steel

Electrostatic powder coating

Lens angle 25°-40° -60°-80°

Color standard 7040, optional RAL codes

Input 100-240V AC 50 / 60 Hz

Power factor (min.) 0.92

Mono color (Standard)

DALI controllable (Optional)(External)

0-10V / 1-10V controllable (Optional) (External)

Safety Class I

Protection Class IP67

Impact strenght IK09

Operation temperature -25°C / +55°C

Weight: Single Head: 1,87 kg , Double Head: 3,05 kg

Complies with European standards

EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

