


**SINGLE HEAD**

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-011-09-09-XX-X	8W	9W	1240lm - 1305lm	756lm - 796lm	3000K-4000K
20-011-015-09-XX-X	14W	15W	1821lm - 1916lm	1111lm - 1169lm	3000K-4000K

**DOUBLE HEAD**


CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-011-018-018-XX-X	16W	18W	1663lm - 1742lm	1512lm - 1584lm	3000K-4000K
20-011-018-030-XX-X	27W	30W	2442lm - 2574lm	2220lm - 2340lm	3000K-4000K

XX : Lens Angle, X : Led Color


Standard color temperature 4000K, also available with 6500K on request.

# QUARK ROUND

EN 60598 | IK09 | IP67 | CE

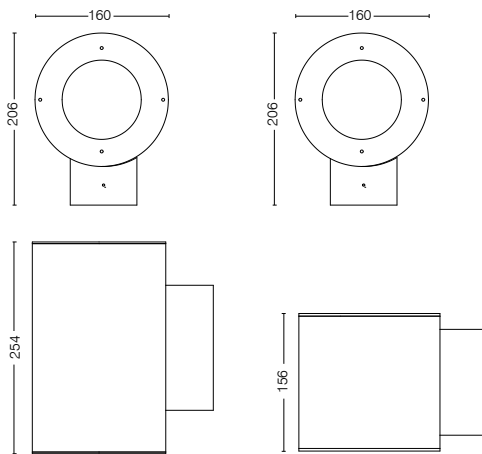

## Photometric Curves

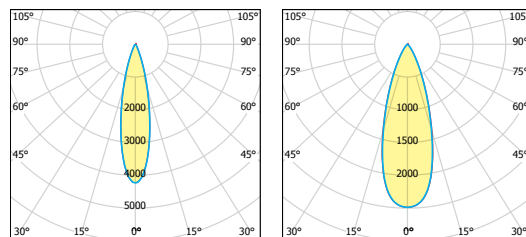

## Technical Specifications

Sconce made of aluminium die cast & extrusion  
 Aluminium and stainless steel  
 Clear 5mm safety glass  
 Silicon base seal gasket  
 Mounting bracket made of steel  
 Electrostatic powder coating  
 Lens angle 30°-50° (9 in 1 full lens)  
 Color standard 7040, optional RAL codes  
 Input 90 -264V AC 50 / 60 Hz  
 Power factor (min.) 0.92

Mono color (Standard)  
 DALI controllable (Optional)(External)  
 0-10V / 1-10V controllable (Optional) (External)  
 Safety Class I  
 Protection Class IP67  
 Impact strength IK09  
 Operation temperature -25°C / +55°C  
 Weight: Single Head: 2,13 kg , Double Head: 3,38 kg  
 Complies with European standards  
 EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

