



#### SINGLE HEAD

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-013-018-018-XX-X	16W	18W	2273lm - 2392lm	2046lm - 2152lm	3000K-4000K
20-013-018-025-XX-X	23W	25W	2924lm - 3077lm	2631lm - 2769lm	3000K-4000K


#### DOUBLE HEAD

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-013-036-036-XX-X	33W	36W	4475lm - 4712lm	4068lm - 4284lm	3000K-4000K
20-013-036-050-XX-X	46W	50W	6215lm - 6545lm	5650lm - 5950lm	3000K-4000K





XX : Lens Angle, X : Led Color  
Standard color temperature 4000K, also available with 6500K on request.

# BLAZE SQUARE

EN 60598 | IK09 | IP67 | CE

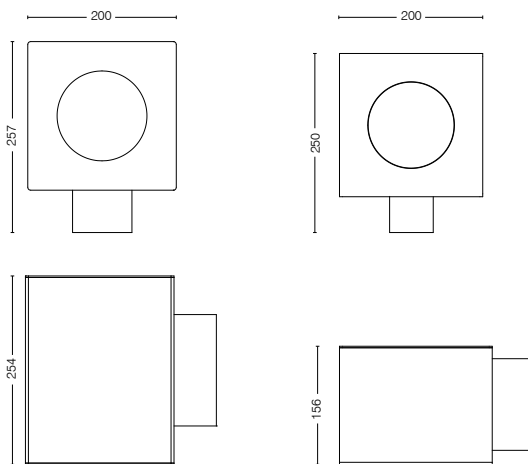

## Photometric Curves



## Technical Specifications

Sconce made of aluminium die cast & extrusion  
 Aluminium and stainless steel  
 Clear 5mm safety glass  
 Silicon base seal gasket  
 Mounting bracket made of steel  
 Electrostatic powder coating  
 Lens angle 8°-25°-45°-60°  
 Color standard 7040, optional RAL codes  
 Input 90 -264V AC 50 / 60 Hz  
 Power factor (min.) 0.92

Mono color (Standard)  
 DALI controllable (Optional)(External)  
 0-10V / 1-10V controllable (Optional) (External)  
 Safety Class I  
 Protection Class IP67  
 Impact strength IK09  
 Operation temperature -25°C / +55°C  
 Weight: Single Head: 3,27 kg , Double Head: 4,8 kg  
 Complies with European standards  
 EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

