



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-74-120-X	110W	120W	11040lm - 11640lm	3000K-4000K

X : Led Color

USED POWER SUPPLY BRANDS





USED LED BRANDS



# ELA DOUBLE

EN 60598 | IP66 | CE

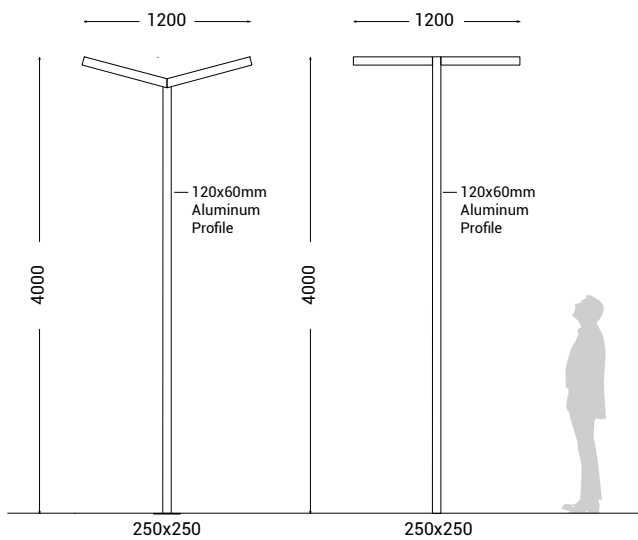

## Technical Specifications

Total Height 4m

Body Pole Aluminium Profile

All RAL Codes or Special architectural paints

Luminary Part Manufactured from Aluminium

Diffuser PMMA

Insulation Class II

Mounting Detail Anchor System

LED Driver 546mA

Cable 3\*1,5TTR Non-flammable

Operating Temperature -20°C +55°C

Elliptical Shaped asymmetrical lenses

CRI 3000K>80 / 4000K>70

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



Scan QR Code to get all technical documents and the other updated files for this product.

