

LEDBAR 4 14W/M IP67






LINEAR LUMINARIES

IP66



EN60598 CE

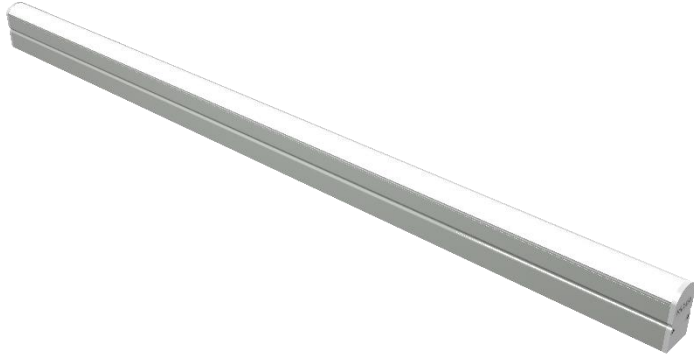

Height (H)

500mm
1000mm
1500mm
2000mm

PRODUCT DATA

General Information

Number of light source	60 LED/ Meter
LED module	Mid Power LED's
Light distribution	120°
Light source colour	3000K-4000K
Number of gear unit	1 unit
Driver / power unit	PS (Constant voltage)
Driver included	No
Optical cover / lens type	Diffuser
Control interface	On/Off
Connection	IP67 connector
Cable	2x0,75 mm ²
Protection class IEC	Safety class I
CE mark	CE mark
ENEC mark	-
Warranty period	5 years
Optic type	Symmetric
EU RoHS compliant	Yes
Light source engine type	LED
LDT / IES photometric file	Available
Life span	Estimated average 50.000 hours
MacAdams	CCT tolerance within a 3 step MacAdams ellipse
Product code	10-04-14-60-67-X (XX: Lens angle, X: Led colour)

Operating and Electrical

Input Voltage	12 V DC
Input frequency	-
Inrush current	1200 mA
Power factor (min.)	0.92

Control and Dimming

Dimmable(optional)	1-10V - DALI
DMX	-

Mechanical and Housing

Housing material	Aluminium extrusion
Gasket	Epoxy resin
Optic material	PMMA
Optical cover / lens material	Diffuser
Fixation material	Steel mounting bracket
Mounting device	-
Effective projected area	0,02m ² , 0,03m ² , 0,05m ² , 0,06m ²
Colour	Grey
Dimensions (height x width x depth)	500, 1000, 1500, 2000 x 18 x 30 mm

Approval and Application

Ingress protection code	IP67
Mech. impact protection code	-
Surge protection (common/differential)	6KV/4KV

Initial Performance (IEC Compliant)

Module luminous flux	1085 lm (4000K) / 1060 lm (3000K)
Luminaire luminous flux	986 lm (4000K) / 964 lm (3000K)
LED luminaire efficiency	70 lm (4000K) / 69 lm (3000K)
Colour Temperature	4000K / 3000K
	6500K also available up on request.

Colour rendering index	≥70
Rated LED power	13W/meter
Rated luminaire power	14W/meter

Application Conditions

Ambient temperature range	-25°C to +55°C
Maximum dimming level	-
Net weight (piece)	0,3 kg

Fixture Run Length

To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant

BAYLED TEKNOLOJİ A.Ş.

Ahi Evran Mah. 225. Cad. No:84 06935, Sincan ANKARA / TURKEY
T: +90 312 395 76 35 | F: +90 312 395 73 65 | sales@bayled.com.tr

Bayled is a Baytaş group brand.

Scan the QR Code to go to the product web page.



We reserve the right to change specifications without prior written notice.

Current version under: www.bayled.eu