


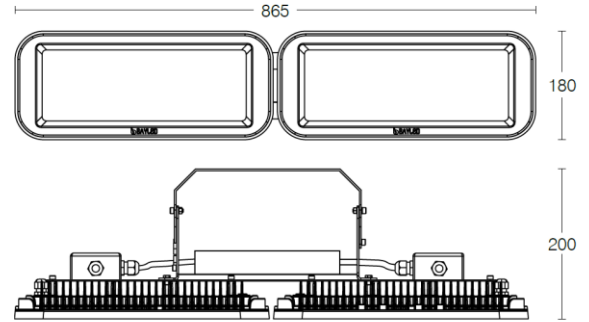

APPLICATION

LED high-performance High-Bays with wide & narrow beam light distribution.

PRODUCT DESCRIPTION

High-Bays made of aluminium die cast, Aluminium and stainless steel.

Clear 5mm safety glass

Silicon rubber gasket

Mounting bracket made of steel with Electrostatic powder coating.

Lens angle 15° - 40° - 60° - 90° - 30°x96°

Colour standard MT-X6-23

Optional RAL codes.

LED power supply unit

Input 100 – 305V AC 50 / 60 Hz

Power factor > 90% full load

6kV surge protection

DALI controllable (optional)

0-10V / 1-10V controllable (optional)

Safety class I

Protection class IP66

Impact strenght IK09

Operation temperature -25°C / +55°C

Wind catching area: 0,16 m²

Weight: 12,5 kg

EULUMDAT files available

Complies with European standards

EN 60598 and CE certificate.

CE -- Conformity mark.

LAMPS

Module connected wattage 230W

Luminaire connected wattage 250W

Ambient temperature t^a max = 55 °C

NW

Module designation 10S109344NC-256

Colour temperature 4000K

Colour rendering index R^a>80

Module luminous flux 34906 lm

Luminaire luminous flux 32882 lm

Luminaire luminous efficiency 143 lm / W

WW

Module designation 10S109344NC-256

Colour temperature 3000K

Colour rendering index R^a>80

Module luminous flux 33171 lm

Luminaire luminous flux 31181 lm

Luminaire luminous efficiency 136 lm / W

Standard colour temperature 4000K

Also available with 3000K on request.