Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
70-001-070-22-XX-X	12W	18W	1794lm - 1853lm	1687lm - 1742lm	3000K-4000K
70-001-100-33-XX-X	18W	24W	2692lm - 2780lm	2530lm - 2613lm	3000K-4000K

X : Led Color
Standard colour temperature 4000K, also available with 6500K on request.

USED POWER SUPPLY BRAND

USED LED BRANDS

LEXA

EN 60598 | IP66 | CE

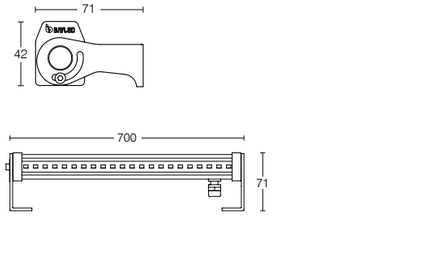

Photometric Curves



Technical Specifications

Wallwasher made of aluminium extrusion,	DALI controllable (optional)
Silicon rubber gasket	0-10V / 1-10V controllable (optional)
Swivel range 95°	Safety class I
Mounting bracket made of plastic.	Protection class IP66
LED chip angle 125°(without lens)	Operation temperature -25°C / +55°C
Colour standard mat anodizied,	Wind catching area: 0,06m²
Input 170 –240V AC 50 / 60 Hz	Weight: 0,75kg
Power factor > 90% full load	Complies with European standards
Mono Colour (Standard)	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least

IP66

For updated information about product lighting specifications please visit: www.bayled.eu