



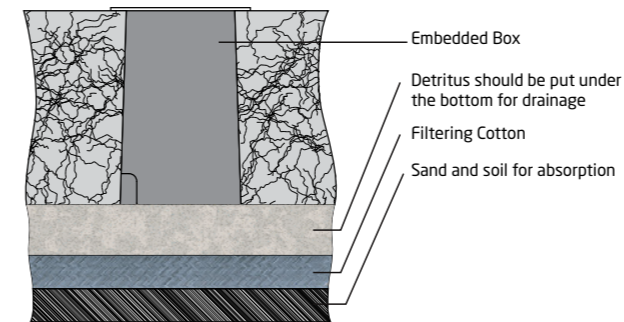


# ANKA

EN 60598 | IK09 | IP67 | CE



## Photometric Curves

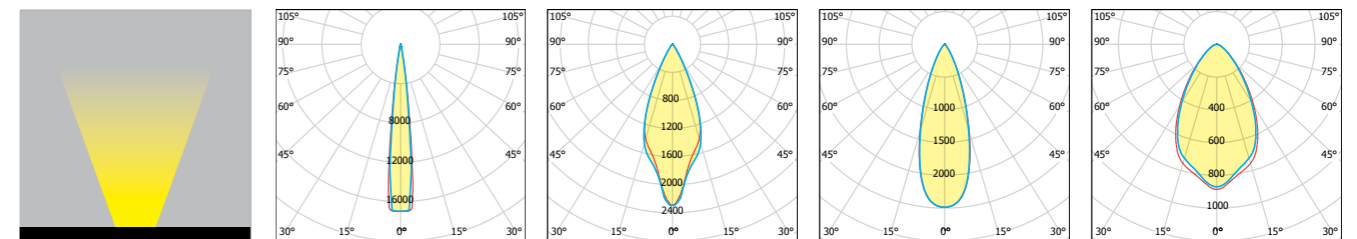

### Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
15-05-01-01-XX-X	1W	1W	147lm - 154lm	138lm - 145lm	3000K-4000K
15-05-01-03-XX-X	3W	3W	439lm - 462m	413lm - 435lm	3000K-4000K

XX : Lens Angle, X : Led Color  
Standard colour temperature 4000K, also available with 6500K on request.

## Technical Specifications

Inground made of aluminium die cast	Mono colour (Standard)
Aluminium and stainless steel	DALI controllable (Optional)(External)
Clear 6mm safety glass	0-10V / 1-10V controllable (Optional) (External)
Silicon base seal gasket	Safety Class I
Mounting bracket made of plastic	Protection Class IP67
Electrostatic powder coating	Impact strenght IK09
Lens angle 8°-25°-40°-60°	Operation temperature -25°C / +55°C
Colour standard 7040, optional RAL codes	Weight: 0,47 kg
Input 170 -240V AC 50 / 60 Hz	Complies with European standards
Power factor > 87% full load	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: [www.bayled.eu](http://www.bayled.eu)