




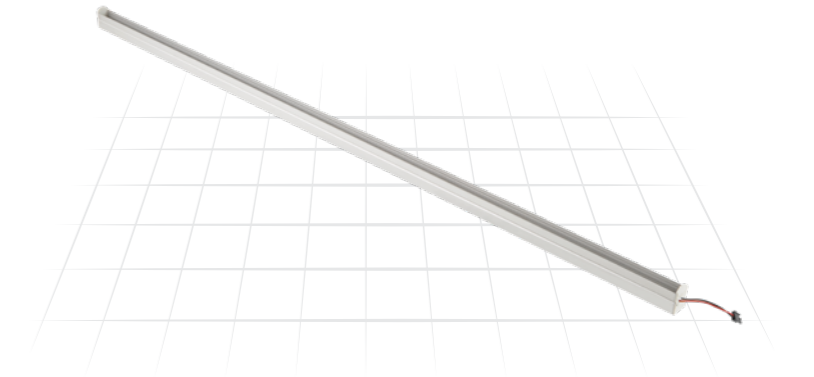


LED BAR 4

EN 60598 | IP20 / IP65 | CE

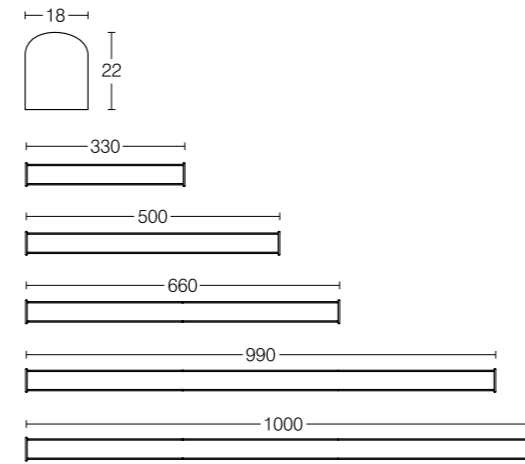

Photometric Curves

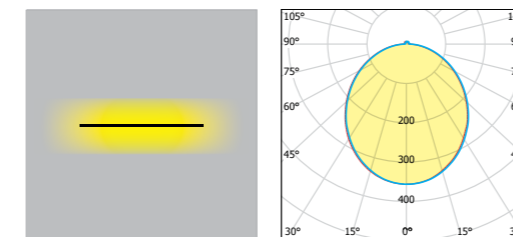

Optional Accessories



Purchase Order Table

CODE	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
6	6W/m	720Lm/m	3000K-4000K
10	10W/m	1.440Lm/m	3000K-4000K
14	14W/m	1.620Lm/m	3000K-4000K

Standard colour temperature 4000K, also available with 6500K on request.

Technical Specifications

Linear lights made of aluminium extrusion	0-10V / 1-10V controllable (Optional)
Clear - Opal polycarbon diffuser (Optional)	RGB PWM signal with RC (Optional)
Colour standard mat anodizing	DMX 512 (Optional)
Input 24V DC (1.2V Optional)	Safety Class II
Power factor > 93% full load	Protection Class IP20 / IP65
Diffuser angle 120°	Operation temperature -25°C / +55°C
Mono colour (Standard)	Complies with European standards
DALI controllable (Optional)	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: www.bayled.eu

