




MIRA / (RGB Look at page 263 for connection diagram.)


EN 60598 | IK09 | IP66 | CE

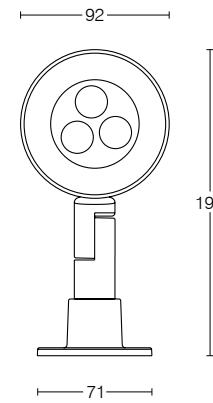

Optional Accessories



Photometric Curves

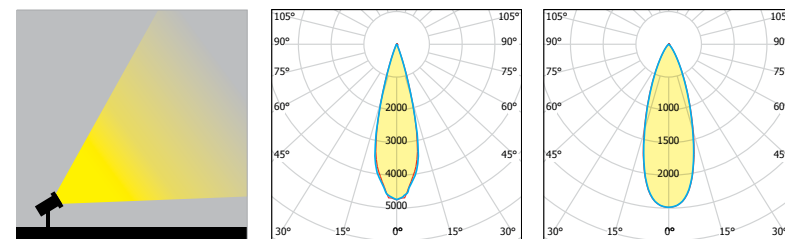

Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-01-3-XX-X	3W	3W	439lm - 462m	413lm - 435lm	3000K-4000K

XX : Lens Angle, X : Led Color
Standard colour temperature 4000K, also available with 6500K on request.

Technical Specifications

Floodlight made of aluminium die cast	Mono colour (Standard)
Aluminium and stainless steel fittings	DALI controllable (optional) (external)
Clear 3mm polycarbon glass	0-10V / 1-10V controllable (optional) (external)
Silicon base seal gasket	Safety Class I
Mounting bracket made of plastic	Protection Class IP66
Electrostatic powder coating	Operation temperature -25°C / +55°C
Lens angle 15°-45°(3 in 1 full lens)	Weight: 0,75 kg
Colour standard 7040, optional RAL codes	Complies with European standards
Input 170 -240V AC 50 / 60 Hz	EN 60598 and CE certificate
Power factor > 87% full load	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: www.bayled.eu