




**NERO / (RGB)** Look at page 260 for connection diagram.


EN 60598 | IK10 | IP66 | CE

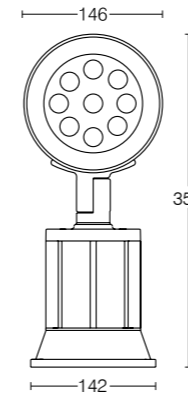

**Optional Accessories**



**Photometric Curves**

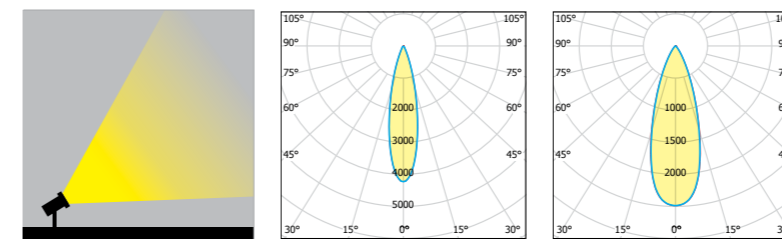

**Purchase Order Table**

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
20-02-009-XX-X	9W	12W	1318lm - 1387lm	1239lm - 1304lm	3000K-4000K

XX : Lens Angle, X : Led Color  
Standard colour temperature 4000K, also available with 6500K on request.

**Technical Specifications**

Floodlight made of aluminium die cast	Mono colour (Standard)
Aluminium and stainless steel fittings	DALI controllable (optional)
Clear 3mm polycarbon glass	0-10V / 1-10V controllable (optional)
Silicon base seal gasket	Safety Class I
Mounting bracket made of plastic	Protection Class IP66
Electrostatic powder coating	Operation temperature -25°C / +55°C
Lens angle 30° - 50° (9 in 1 full lens)	Weight: 1,66 kg
Colour standard 7040, optional RAL codes	Complies with European standards
Input 110 - 240V AC 50 / 60 Hz	EN 60598 and CE certificate
Power factor > 90% full load	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: [www.bayled.eu](http://www.bayled.eu)