

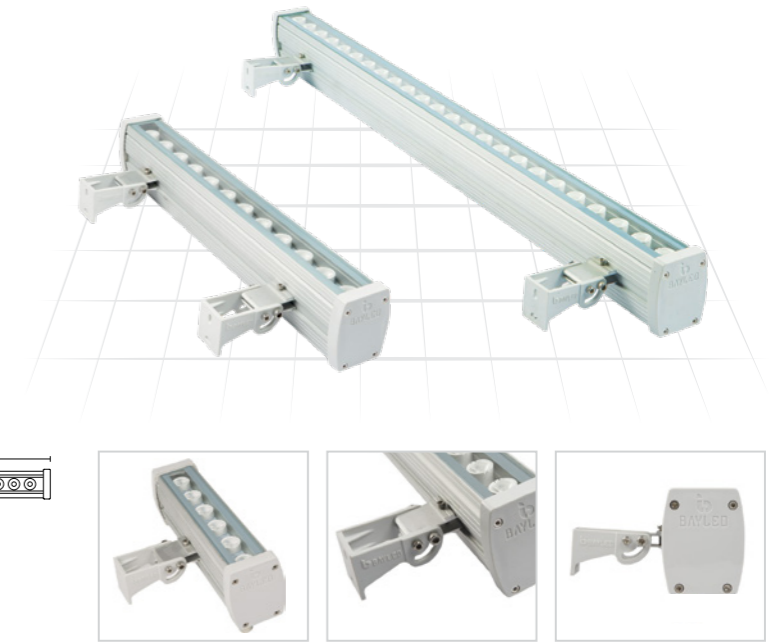








NOVA

EN 60598 | IP66 | CE

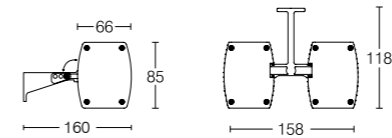

Photometric Curves

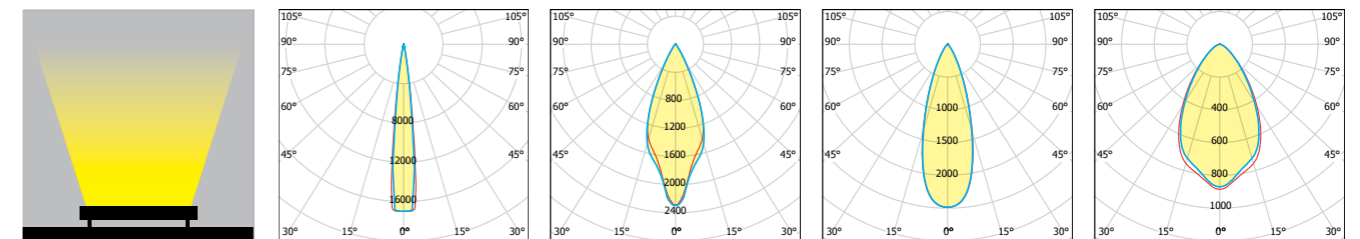

Purchase Order Table

| CODE | MODULE POWER | LUMINAIRE POWER | MODULE LUMINOUS FLUX | LUMINAIRE LUMINOUS FLUX | COLOR TEMPERATURE |
|---------------------|--------------|-----------------|----------------------|-------------------------|-------------------|
| 01-001-025-006-XX-X | 6W | 10W | 894lm - 941lm | 840lm - 884lm | 3000K-4000K |
| 01-001-050-012-XX-X | 12W | 15W | 1778lm - 1871lm | 1671lm - 1758lm | 3000K-4000K |
| 01-001-095-024-XX-X | 24W | 30W | 3555lm - 3741lm | 3342lm - 3517lm | 3000K-4000K |
| 01-001-140-036-XX-X | 36W | 45W | 5333lm - 5612lm | 5013lm - 5275lm | 3000K-4000K |

XX : Lens Angle, X : Led Color
Standard colour temperature 4000K, also available with 6500K on request.

Technical Specifications

| | |
|---|--|
| Wallwasher made of aluminium extrusion, | 0-10V / 1-10V controllable (optional) |
| Clear 5mm safety glass | Safety class I |
| Silicon rubber gasket | Protection class IP66 |
| Swivel range 95° | Operation temperature -25°C / +55°C |
| Mounting bracket made of plastic. | Wind catching area: 0,08m² |
| Lens angle 8° - 25° - 45° - 60° | Weight: 24,5cm: 0,95kg / 48cm: 1,8kg |
| Colour standard mat anodized, | Weight: 93,5cm: 3,07kg / 140cm: 4,43kg |
| Input 110 - 240V AC 50 / 60 Hz | EULUMDAT files available |
| Power factor > 90% full load | Complies with European standards |
| Mono Colour (Standard) | EN 60598 and CE certificate |
| DALI controllable (optional) | |

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: www.bayled.eu

USED POWER SUPPLY BRANDS



USED LED BRANDS

