





ORCA 9 (RGB)  Look at page 263 for connection diagram.

EN 60598 | IP68 | CE

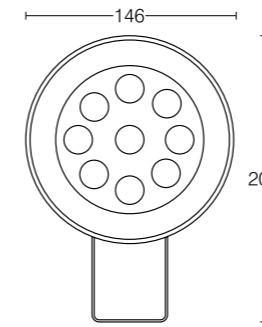

Max. Depth: 80cm

Photometric Curves

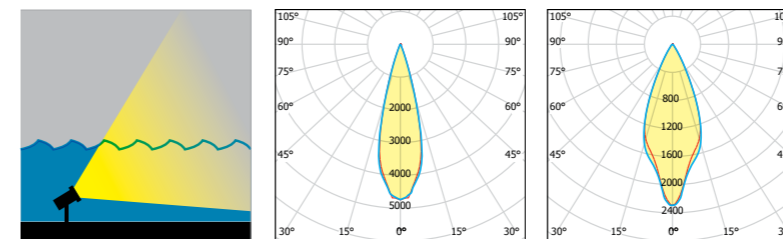

Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
30-02-24-9-XX-X	9W	12W	1318lm - 1387lm	1239lm - 1304lm	3000K-4000K

XX : Lens Angle, X : Led Color  
Standard colour temperature 4000K, also available with 6500K on request.

Technical Specifications

Under water made of stainless steel	DALI controllable (Optional)
Clear 3mm polycarbon glass	0-10V / 1-10V controllable (Optional)
Silicon base seal gasket	Safety Class I
Mounting bracket made of stainless steel	Protection Class IP68
Lens angle 30°-50° (9 in 1 full lens)	Operation temperature -25°C / +55°C
Front cover colour standard (Chrome)	Weight: 0,57 kg
Input 24 - 36V DC	Complies with European standards
Power factor > 93% full load	EN 60598 and CE certificate
Mono colour (Standard)	

 CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

 Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: [www.bayled.eu](http://www.bayled.eu)

