




VEGA RGB Look at page 261 for connection diagram.

EN 60598 | IP66 | CE

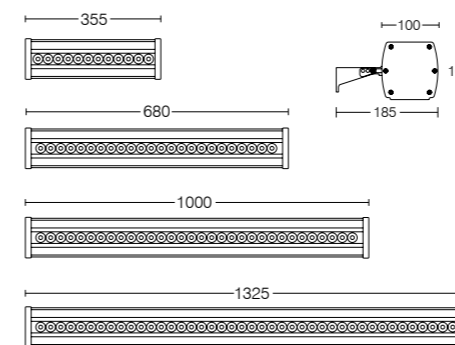

FEATURES

Color-changing and high-quality white light from the same fixture. Vega is an advanced approach to color mixing that enables high-quality intelligent color. Multiple channels of LED lightsources combine to produce a full spectrum of precisely controllable light, including millions of saturated colors, pastels and uniform white light with CRI of greater than 85 in 2700K-4000K range.

FIXTURE RUN LENGTHS


To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.

DMX 512

Interface : Data Enabler (DMX/Bayled)
 Address method : Digital
 Fixture Connections : Male/female XLR



Photometric Curves

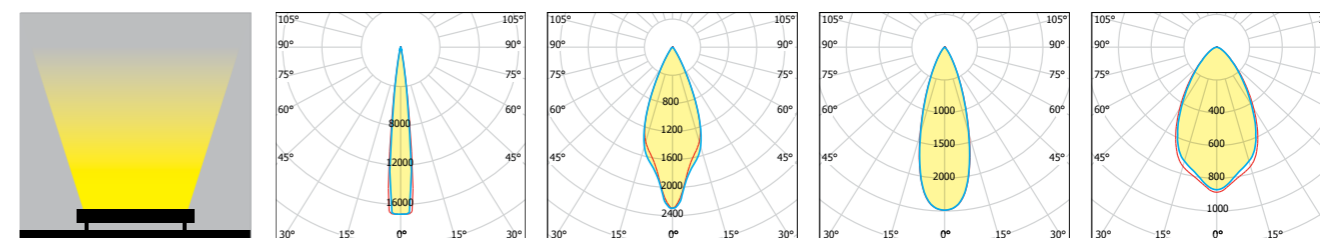

Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
01-02-35-12-XX-RGB	12W	15W
01-02-35-24-XX-RGB	24W	30W
01-02-70-24-XX-RGB	24W	30W
01-02-70-48-XX-RGB	48W	55W
01-02-100-36-XX-RGB	36W	45W
01-02-100-72-XX-RGB	72W	80W
01-02-130-48-XX-RGB	48W	55W
01-02-130-96-XX-RGB	96W	110W

XX : Lens Angle, X : Led Color

Technical Specifications

Wallwasher made of aluminium extrusion,	DMX 512 (Optional)
Clear 5mm safety glass	Safety class I
Silicon rubber gasket	Protection Class IP66
Swivel range 95°	Operation temperature -25°C / +55°C
Mounting bracket made of plastic.	Wind catching area: 0,14m²
Lens angle 8°- 25°- 45°- 60°	Weight: 35,5cm: 2kg / 68cm: 3.53kg
Colour standard mat anodized,	Weight: 100cm: 4.84kg / 132,5cm: 6.3kg
Input 110 – 240V AC 50 / 60 Hz	Complies with European standards
Power factor > 90% full load	EN 60598 and CE certificate
RGB PWM signal with RC (Standard)	

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: www.bayled.eu