

MARCO D200 28 W




BOLLARDS

IP66

IK08



EN60598 CE

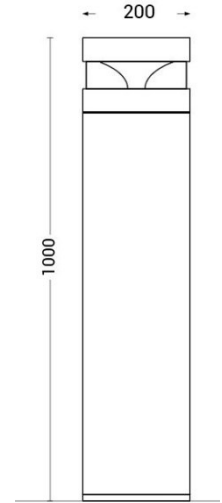

PRODUCT DATA

General Information

Number of light source	84 pcs
LED module	Mid Power LED's on alu-PCB
Light distribution	360°
Light source colour	3000K-4000K
Number of gear unit	-
Driver / power unit	PS (Constant current)
Driver included	Yes
Optical cover / lens type	Diffuser
Control interface	On/Off
Connection	-
Cable	3x0,75 mm ²
Protection class IEC	Safety class II
CE mark	CE mark
ENEC mark	-
Warranty period	3 years
Optic type	Symmetric
EU RoHS compliant	Yes
Light source engine type	LED
LDT / IES photometric file	Available
Life span	Estimated average 50.000 hours
MacAdams	CCT tolerance within a 3 step MacAdams ellipse
Product code	84-D200-28-X (XX: Lens angle, X: Led colour)

Operating and Electrical

Input Voltage	198-264 V AC
Input frequency	50 to 60 Hz
Inrush current	127 mA
Power factor (min.)	0.92

Control and Dimming

Dimmable(optional)	-
DMX	-

Mechanical and Housing

Housing material	Aluminium
Gasket	Silicone
Optic material	-
Optical cover / lens material	Plexiglass (5mm)
Fixation material	Stainless steel
Mounting device	-
Effective projected area	0,2m ²
Colour	Black
Dimensions (height x width x depth)	1000 x 200 x 200 mm

Approval and Application

Ingress protection code	IP66
Mech. impact protection code	IK08
Surge protection (common/differential)	2KV / 1KV

Initial Performance (IEC Compliant)

Module luminous flux	2345 lm (4000K) / 2271 lm (3000K)
Luminaire luminous flux	2132 lm (4000K) / 2065 lm (3000K)
LED luminaire efficiency	75 lm (4000K) / 73 lm (3000K)
Colour Temperature	4000K / 3000K
	6500K also available up on request.
Colour rendering index	≥70
Rated LED power	26 W
Rated luminaire power	28 W

Application Conditions

Ambient temperature range	-25°C to +55°C
Maximum dimming level	-
Net weight (piece)	Variable

Fixture Run Length

To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant

BAYLED TEKNOLOJİ A.Ş.

Ahi Evran Mah. 225. Cad. No:84 06935, Sincan ANKARA / TURKEY
T: +90 312 395 76 35 | F: +90 312 395 73 65 | sales@bayled.com.tr

Bayled is a Baytaş group brand.

Scan the QR Code to go to the product web page.



We reserve the right to change specifications without prior written notice.

Current version under: www.bayled.eu