



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	MODULE LUMINOUS FLUX	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
01-03-25-09-XX-X	10W	12W	1405lm-1479lm	1321lm-1390lm	3000K-4000K
01-03-50-18-XX-X	20W	25W	2810lm-2957lm	2642lm-2780lm	3000K-4000K



XX : Lens Angle, X : Led Color
Standard colour temperature 4000K, also available with 6500K on request.

USED POWER SUPPLY BRAND
TRIDONIC


USED LED BRANDS
NICHIA
LUMILEDS

ECHO

EN 60598 | IP66 | CE

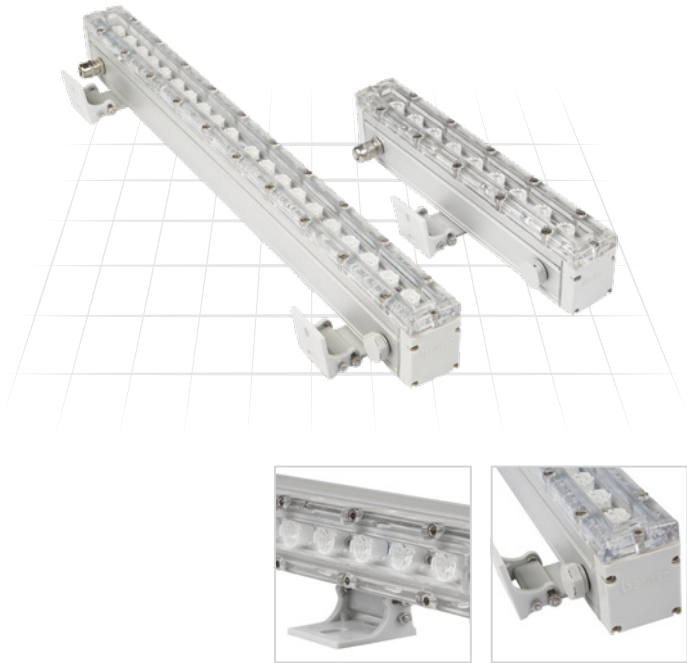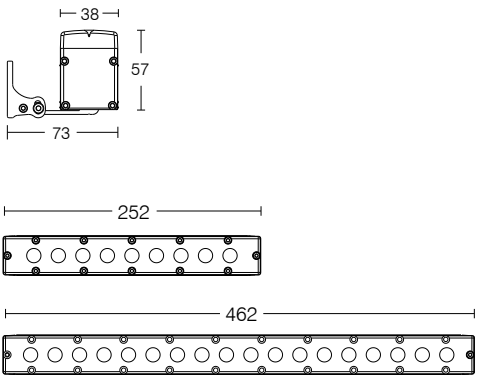

Photometric Curves

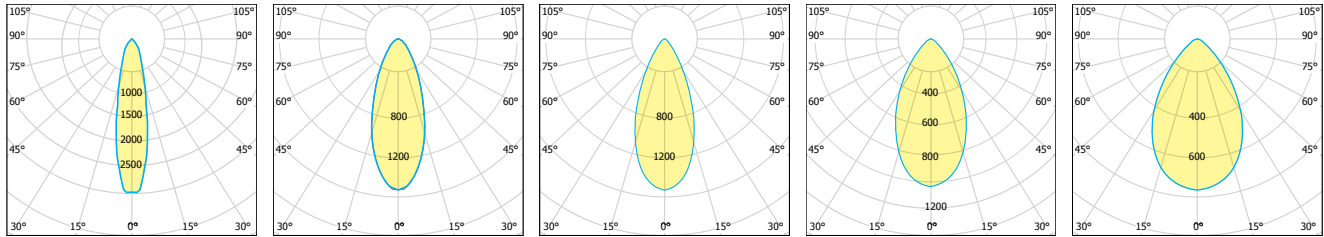

Technical Specifications

Wallwasher made of aluminium extrusion,	DALI controllable (optional)
Silicon rubber gasket	0-10V / 1-10V controllable (optional)
Swivel range 30°	Safety class I
Mounting bracket made of plastic.	Protection class IP66
Lens angle 12°- 25°- 40°- 60°- 80°	Operation temperature -25°C / +55°C
Colour standard mat anodized,	Wind catching area: 0,08m²
Input 170 –240V AC 50 / 60 Hz	Weight: 25cm: 0,55kg / 50cm: 1,1kg
Power factor > 90% full load	Complies with European standards
Mono Colour (Standard)	EN 60598 and CE certificate

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: www.bayled.eu