


LIBRA RGB Look at pages 264 for connection diagram.

EN 60598 | IK09 | IP67 | CE

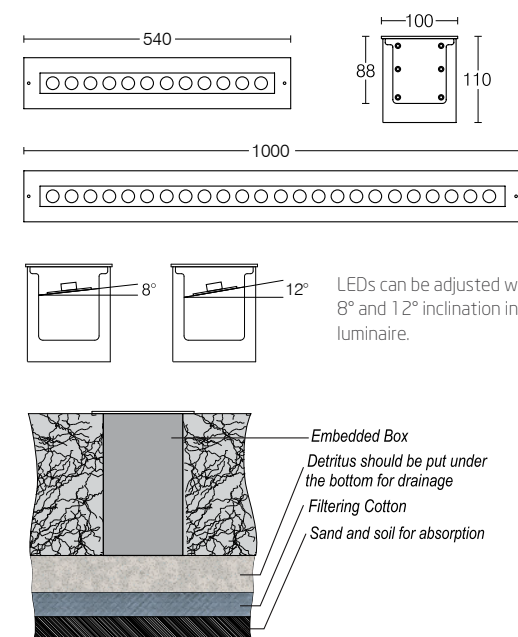

FEATURES

Color-changing and high-quality white light from the same fixture. Vega is an advanced approach to color mixing that enables high-quality intelligent color. Multiple channels of LED light sources combine to produce a full spectrum of precisely controllable light, including millions of saturated colors, pastels and uniform white light with CRI of greater than 85 in 2700K-4000K range.


FIXTURE RUN LENGTHS

To calculate fixture run lengths and total power consumption for your specific installation, please ask to company assistant.

DMX 512

Interface : Data Enabler (DMX/Bayled)
Address method : Digital
Fixture Connections : Male/female XLR

Photometric Curves

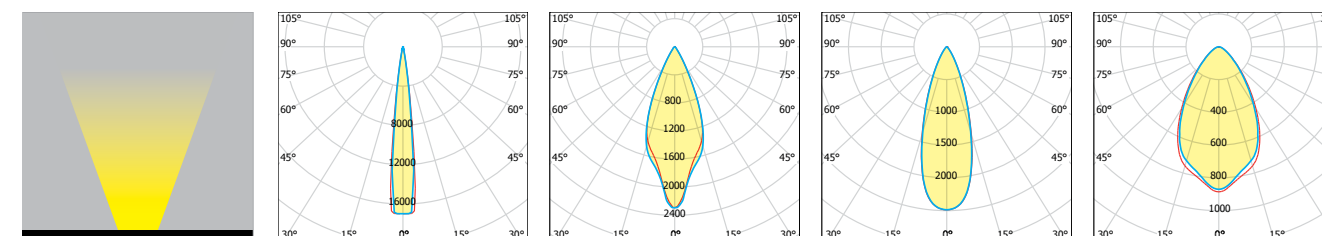

Technical Specifications

Inground made of aluminium extrusion,	RGB (Standard)
Aluminium and stainless steel	DMX 512 (Optional), RF (Optional)
Clear 8mm safety glass	Safety Class I
Silicon base seal gasket	Protection Class IP67
Mounting bracket made of steel	Impact strength IK09
Electrostatic powder coating	Operation temperature -25°C / +55°C
Lens angle 8°-25°-45°-60°	Weight: 18W: 5,1kg / 36W: 9,2kg
Colour standard 7040, optional RAL codes	Complies with European standards
Input 24V -48V DC	EN 60598 and CE certificate
Power factor > 90% full load	

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: www.bayled.eu

Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER
15-04-50-18-XX-X	18W	20W
15-04-100-36-XX-X	36W	40W

XX : Lens Angle, X : Led Color
Standard colour temperature 4000K, also available with 6500K on request.

USED POWER SUPPLY BRAND



USED LED BRANDS

