




TORRE

EN 60598 | IK10 | IP65 | CE

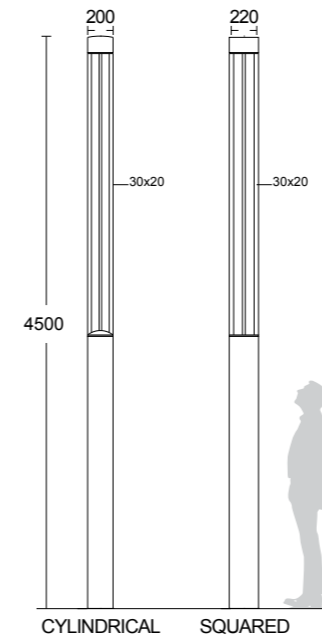


SQUARED



CYLINDRICAL



Photometric Curves



Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-57-50-X	50W	60W	6169lm - 6492lm	3000K-4000K

X : Led Color

Technical Specifications

Total Height 4,5m	Mounting Detail Anchor System
Body Pole Aluminium	LED Driver 1400mA
All RAL Codes or Special architectural paints	Cable 3*1,5TTR Non-flammable
Luminaire Part Manufactured from Aluminium	Operating Temperature -20°C +55°C
Protection Class IP65	Elliptical Shaped asymmetrical lenses
Insulation Class II	CRI 3000K>80 / 4000K>70
Luminaire Dimensions, 220x220mm	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: www.bayled.eu

