


**BLOCCO** 

EN 60598 | IP65 | **(€** 



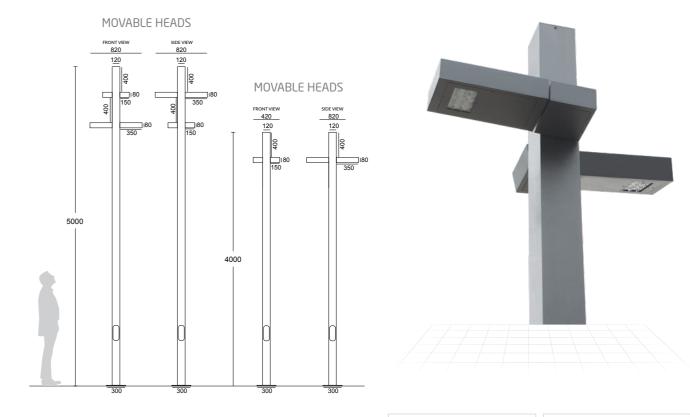

## Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-58-80-X	80W	100W	9871lm - 10387lm	3000K-4000K

Fixture watt which is given for double head

X : Led Color

## **Technical Specifications**

Luminary Dimensions 150*80mm	Mounting Detail Anchor System
Total Height 5m	LED Driver 700mA
Body Pole Aluminium Profile	Cable 3*1,5TTR Non-flammable
All RAL Codes or Special architectural paints	Operating Temperature -20°C +55°C
Luminary Part Manufactured from Aluminium	Eliptical Shaped asymmetrical lenses
Diffuser PMMA	CRI 3000K>80 / 4000K>70
Insulation Class II	
	60 146 1 50 000
CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant	(a) Lifetime 50.000 working hours at least

USED POWER SUPPLY BRANDS

PHILIPS MOONS' MUSU\*

WNICHIA
USED LED BRANDS
WICHIA
LUMILEDS

LED UV IR VOX (UF) Saver (1) IP65 (4) (4) (4) (5) (6) (6) (7)

For updated information about product lighting specifications please visit: www.bayled.eu