



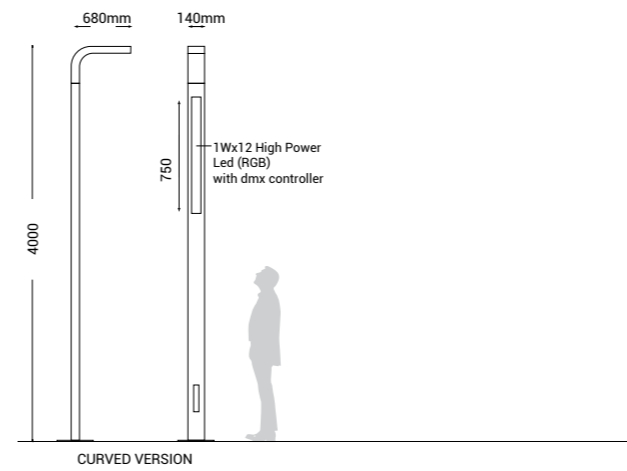

ELA

EN 60598 | IP66 | CE

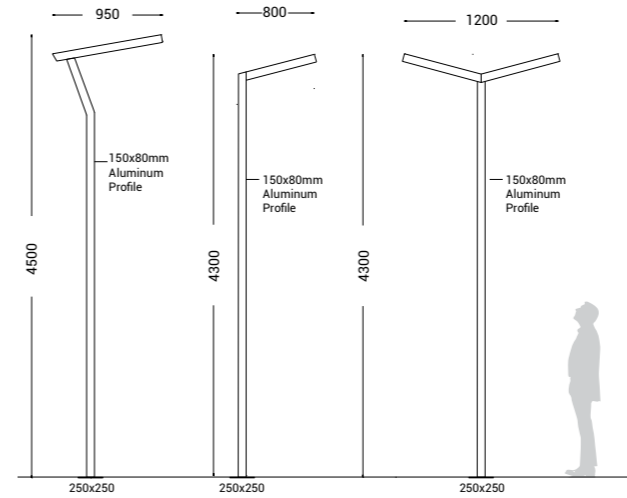

FLAT



CURVED



Report the model chosen at the time of purchase to the sales representative.

Purchase Order Table

CODE	MODULE POWER	LUMINAIRE POWER	LUMINAIRE LUMINOUS FLUX	COLOR TEMPERATURE
60-74-60-X	75W	75W	4920lm - 5340lm	3000K-4000K

X : Led Color

Technical Specifications

Luminaire Dimensions 140x800x680mm	Mounting Detail Anchor System
Total Height 5m	LED Driver 1050mA
Body Pole Aluminium Profile	Cable 3*1,5TTR Non-flammable
All RAL Codes or Special architectural paints	Operating Temperature -20°C +55°C
Luminaire Part Manufactured from Aluminium	Elliptical Shaped asymmetrical lenses
Diffuser PMMA	CRI 3000K>80 / 4000K>70
Insulation Class II	

CCT tolerance within a 3 step MacAdams ellipse and LM80 compliant

Lifetime 50.000 working hours at least



For updated information about product lighting specifications please visit: www.bayled.eu

