


# WALLWASHER VEGA 127CM 96W RGB-RGBA IP66 IK08 EN60598 (€

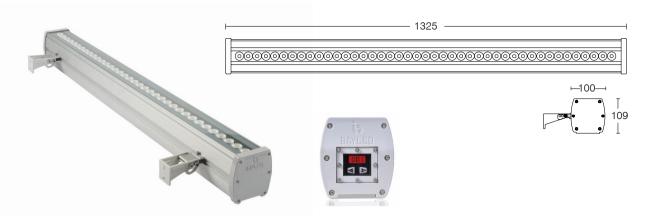

# **APPLICATION**

LED high-performance wallwashers with wide & narrow beam light distribution.

### PRODUCT DESCRIPTION

LED wall washing fixture with intelligent white and color light.
Fixture made of aluminium alloy,
Aluminium and stainless steel.
Clear 5mm safety glass
Silicon rubber gasket
Swivel range 95°
Mounting bracket made of plastic.
Lens angle 8°- 25°- 45°- 60°

Colour standard: Mat anodizied optional RAL codes.
LED power supply unit

Input 110 – 240V AC 50 / 60 Hz Power factor > 90% full load DALI controllable. DMX 512 or

0-10V / 1-10V controllable.

Safety class I

Protection class IP66 Impact strenght IK08

Operation temperature -25°C / +55°C

Wind catching area: 0,14m2

Weight: 6,3 kg

info@bayled.com.tr

Complies with European standards EN 60598 and CE certificate.

C ← -- Conformity mark.

#### **LAMPS**

Module connected wattage 96W Luminaire connected wattage 100W Rated temperature  $t^a = 25 \, ^{\circ}\text{C}$  Ambient temperature  $t^a = 35 \, ^{\circ}\text{C}$  If the power is reduced, the max ambient temperature will increase. To min. 55  $^{\circ}\text{C}$ 

#### **FEATURES**

Color-changing and high-quality white light from the same fixture. VEGA is an advanced approach to color mixing that enables high-quality intelligent color.

Multiple changels of LED lightsquares combined.

Multiple channels of LED lightsoures combine to produce a full spectrum of precisely controllable light, including millons of saturated colors, pastels and uniform white light with CRI of greater than 85 in 2700K – 4000K range.

# **DMX 512**

Interface : Data Enabler (DMX/Bayled)

Adress method: Digital

Fixture Connections: male/female XLR

#### **DALI – 0-10V**

Interface: Controlable driver.
Control method: Analog with cable.
Fixture Connections: With cable

### **FIXTURE RUN LENGHTS**

To calculate fixture run lenghts and total power consumption for your specific installation, please ask to company assistant.

BAYLED TEKNOLOJİ A.Ş. Ahi Evran Mah. 225. Cad. No:84 06935, Sincan ANKARA / TURKEY T: +90 312 395 76 35 F: +90 312 395 73 65 We reserve the right to change specifications without prior written notice. Edition: 03.05.2016 Current version under: <a href="https://www.bayled.com.tr">www.bayled.com.tr</a> Bayled is a Baytaş group brand.