


ORCA 9 RGB

SPECIFICATION SHEETS

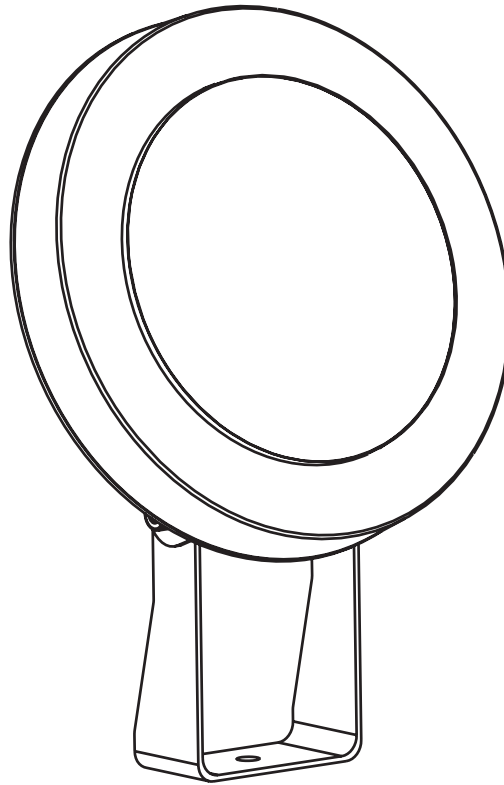

EXPLANATION

ORCA RGB SERIES Series is a powerful and outdoor rated underwater with high lumen output and excellent color consistency. ORCA RGB SERIES are excellent solution for underwater Lighting.

ORCA RGB SERIES Series is produced in 9 pcs colored LED. ORCA RGB SERIES Series has a stainless steel body. It works at 24V DC to ensure connections over long distances. ORCA RGB SERIES Series provides easy setup and programming with standard DMX 512 protocols without special or complex communication protocols.

- ORCA RGB SERIES provides compatible communication with other fixtures using standard DMX 512 protocols without requiring any other special communication protocol or production ID. This feature allows for easy pixel mapping and addressing after all installations have been completed.





- ORCA RGB SERIES ingrounds enable flexible application using very long starter and jumper cables, since they operate in 24V DC input voltage.

- ORCA RGB SERIES Series work through Madrix® or Enttec software and hardware in coordination. Pixel mapping can be made easily by selecting fixtures in Madrix® or Enttec library.



- IP68 class ORCA RGB SERIES, are designed to meet the challenging requirements of exterior applications with their robust and durable structure. It is resistant to shock, vibration and other harsh conditions through die cast aluminium body and PMMA cover.

- Input is delivered through a IP68 connector and cables. Jumper cables can be determined according to the desired length of cable.

Output	RGB 9W
Light Source	9 High Power Colored LEDs
Lumen Maintenance	60.000 > hours L70 @ 50° C (full output)
Color Range	16.7 Million additive RGB colors
Ra(CRI)	RGB Full on ≥70CRI
Beam Angle	30°-50°
Luminous Flux	588 lm
Efficacy (lm/W)	65 lm/W
Control & Programming	
Color Resolution:	3 x 8-bit (Gamma correction)
Addressing:	RDM (Group of Remote Addressable Systems)
PWM Frequency:	1000Hz flicker free dimming
DMX / DALI Compliance:	USITT DMX512-1990
RDM Compliance:	ANSI/ESTA E1.20-2010
Electrical	
Operating Voltage:	12V DC
Power Consumption:	9W
Connections:	Wire and Connector
Physical	
Housing:	Die cast
Front Material:	PMMA
Installation Brackets:	Stainless steel
Gasket:	Silicon
Measurements:	
Dimensions: (height x width x depth)	201 x 146 x 77 mm
Net weight:	0,57 kg
Environmental	
Storage Temperature:	-40°C / +85°C
Ambient Temperature:	-25°C / +50°C
Operating Temperature:	-25°C / +65°C
Cooling:	Cooling by free water convection
Ingress Protection Rating:	IP68
Certificate:	EN 60598, CE
Warranty:	3-year Limited Warranty

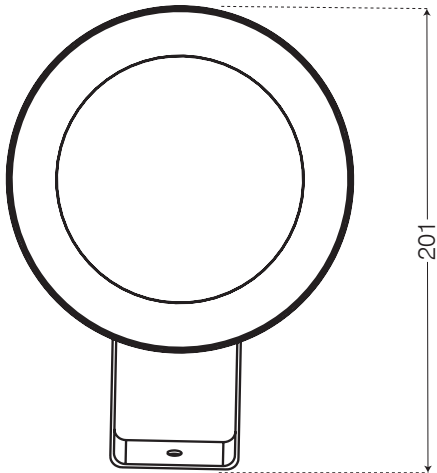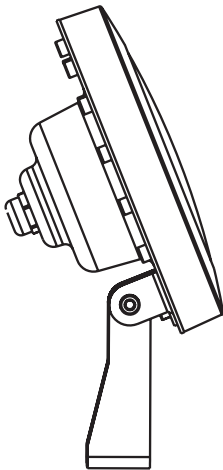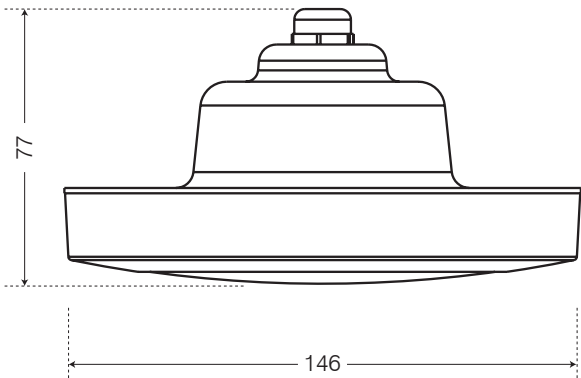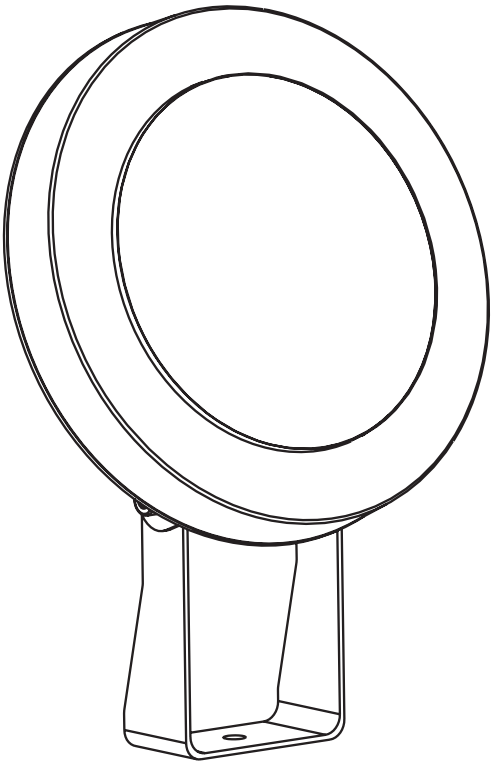

INDOOR ZONE

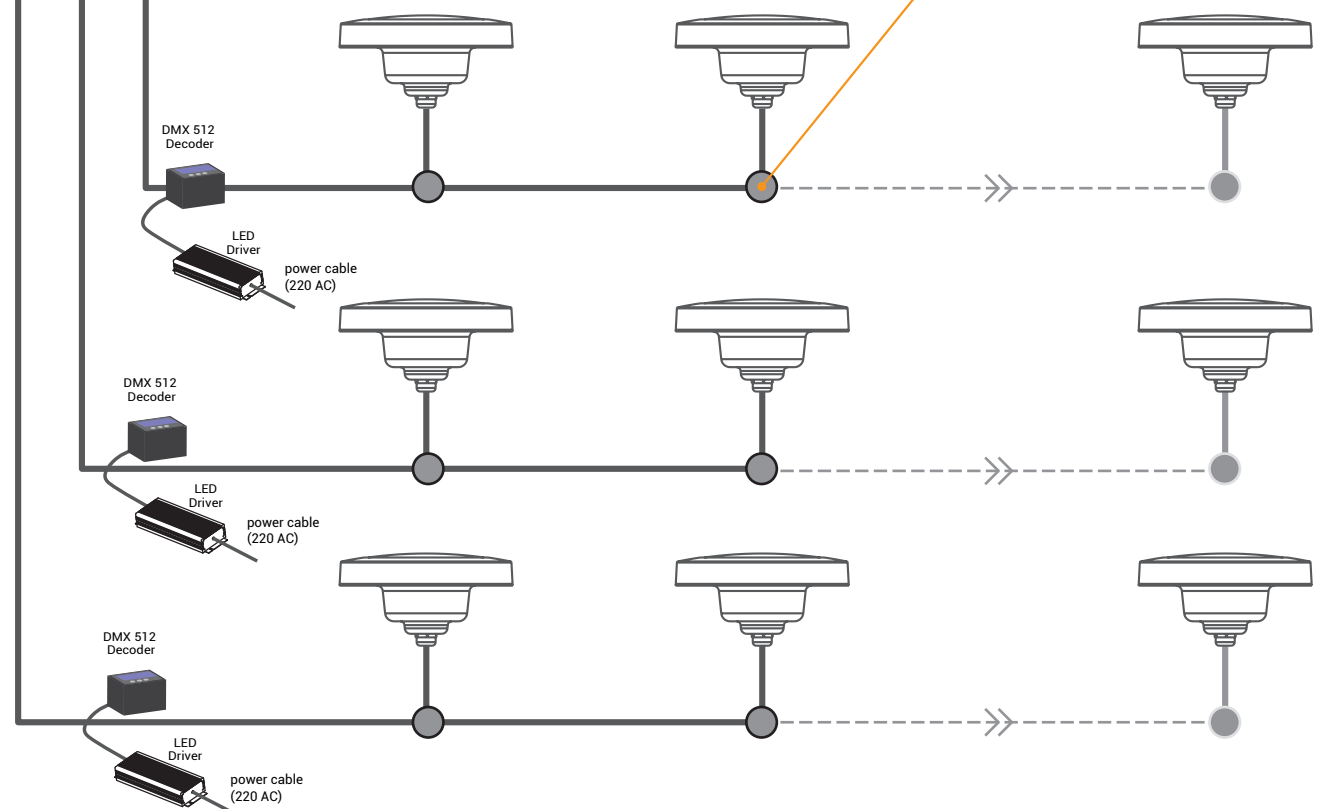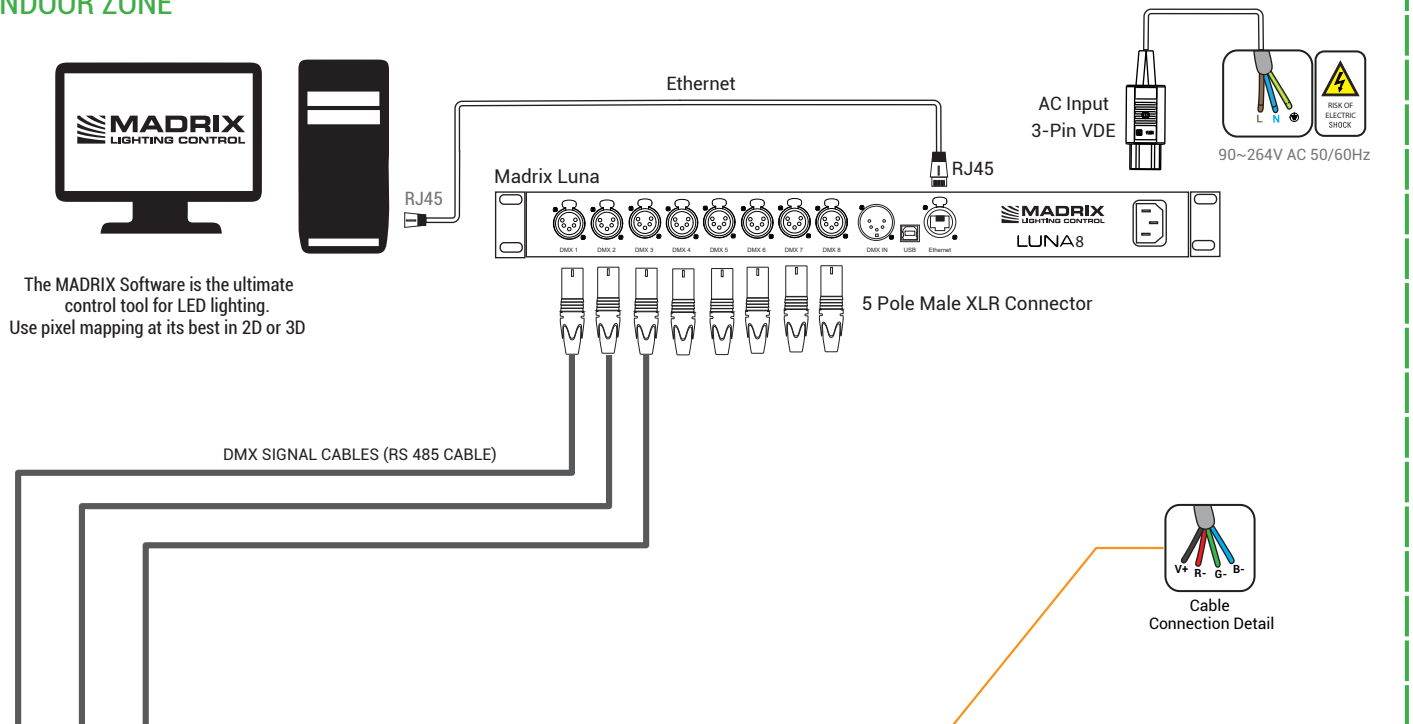**Suggestions to Reach for DMX Control**

The total cable length should not be more than 300m without buffering.

The total fixture number should not be more than 15 pcs on a single line without buffering.

It is recommended to use only connection cables with a characteristic impedance of 120 ohm, where the DMX + and DMX - data lines are intertwined and there is a ground link as a coaxial screen surrounding the inner cores.

120 Ω terminating resistor should be connected between the DMX + and DMX - output connections on the last fixture.

Use a powered DMX splitter/buffer if it is necessary to separate the control link in order to feed fixtures in different locations.

Make sure that the DMX + and DMX - connections do not get crossed at any point.

Notes:

1) Maximum total length of chain (fixtures and leader cable) is 50m.

2) Maximum total length of fixtures in chain is 15 pieces, varies by selected DMX personality.

OUTDOOR ZONE



RDM EXPLANATION

ORCA 9 RGB

complies with the RDM Monitoring Command System. In order to use RDM Monitoring System, a compatible controller is required depending on the installation.

Through DMX data connection, it is possible to control the fixture's settings, send commands and receive or monitor the fixture's data.

DEVICE MANAGEMENT

	GET	SET
Device Info	✓	✓
DMX Start Address	✓	✓
Identify Device	✓	✓
Device Model Description	✓	
Device Label	✓	✓
Software Version Label	✓	
DMX Personality	✓	✓
DMX Personality Description	✓	
Device Power Cycles	✓	
Status ID Description	✓	
Supported Parameters	✓	
Parameter Description	✓	


* The command names and command functions used on different RDM controllers may vary.

* Incompatible RDM controllers may cause drawbacks such as partial operation, no-operation, or incorrect fixture information.

* You can check the recommended RDM controllers on the www.bayled.eu website.

9 LED - MID POWER LED - RGB
(Beam angle options: 30°-50°)

30-02-24-9-XX-RGB

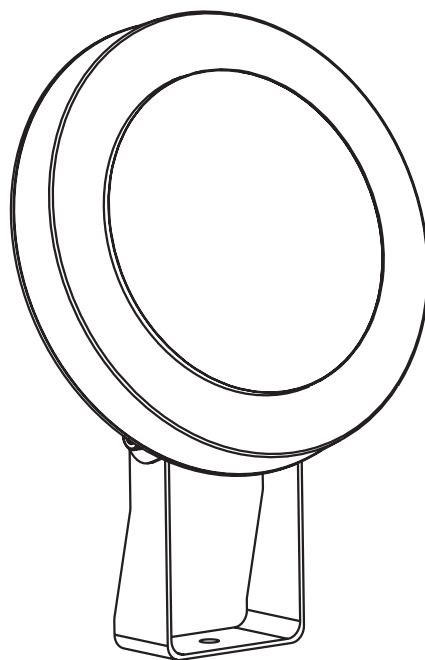

Date _____
Company _____
Project _____




BAYTAŞ AYDINLATMA LTD.ŞTİ.

Sincan Sanayi Sitesi Ahi Evran Mahallesi
255. Cadde No:84 06935 Sincan
Ankara / TÜRKİYE

Tel: +90 (312) 395 76 35 - 45
Faks: +90 (312) 395 73 65

www.bayled.eu

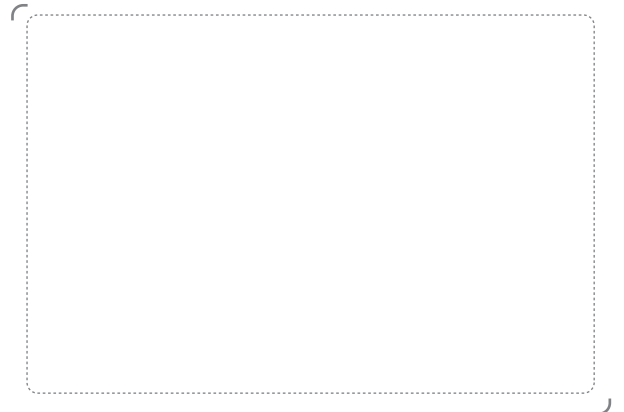

*All rights reserved
BAYLED may change products' specifications and
informations in this document without notifying in advance.
Bayled is a Baytaş Group Brand*

OUR BRANDS

